

Code: BCS-TIP3200IR-E-II

IP CAMERA **BCS-TIP3200IR-E-II** - 1080p 3.6 mm

Net: **99.46 EUR** Gross: **99.46 EUR**

IP camera equipped with very good high resolution sensor. Due to above it is perfect solution for surveillance systems requiring persons or vehicles recognition. Very easy operation by Internet Explorer browser allows the users to convenient and remote support, and also remote management of the camera. Included camera software enables management and integrated monitoring of many network cameras.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.7 " Progressive Scan CMOS
Matrix size:	2.0 Mpx
Resolution:	1920 x 1080 - 1080p 1280 x 960 - 960p 1280 x 720 - 720p 704 x 576 - CIF
Scanning system:	Progressive
Lens:	3.6 mm
View angle:	<ul style="list-style-type: none">• 73 ° (manufacturer data)• 84 ° (our tests result)
S/N ratio:	> 50 dB (AGC off)
Range of IR illumination:	30 m
Image compression method:	H.264 / MJPEG
Bitrate:	32 ... 8192 kbps - H.264 32 ... 12288 kbps - MJPEG
Main stream frame rate:	25 fps @ 1920 x 1080
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	IPv4/IPv6, HTTP, HTTPS, SSL, TCP/IP, UDP, UPnP, ICMP, IGMP, SNMP, RTSP, RTP, SMTP, NTP, DHCP, DNS, PPPOE, DDNS, FTP, IP Filter, QoS, Bonjour
WEB Server:	Built-in, NVR compliance
Max. number of on-line users:	20
ONVIF:	2.41

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) <ul style="list-style-type: none"> • Android: Free application DMSS • iOS (iPhone): Free application DMSS • Windows Phone: Free application wDMSS Lite There are also paid versions of mobile applications: gDMSS Plus, iDMSS Plus, wDMSS plus
RS-485 interface:	—
Alarm inputs / outputs:	—
Main features:	<ul style="list-style-type: none"> • ICR - Movable InfraRed filter • 3D-DNR - Digital Noise Reduction • D-WDR - Wide Dynamic Range • BLC - configurable Back Light Compensation • WB - White Balance (ATW/AWB/manual/indoor/outdoor) • Day/Night mode (color/b&w/auto) • Motion Detection • Configurable Privacy Zones - Mirror - Mirror image
Power supply:	<ul style="list-style-type: none"> • PoE (802.3af) • 12 V DC / 210 mA
Housing:	Metal
Color:	White
"Index of Protection":	IP66
Operation temp:	-20 °C ... 60 °C
Weight:	0.375 kg
Dimensions:	153 x 66 x 67 mm
Manufacturer / Brand:	BCS
Guarantee:	2 years

PRESENTATION


Front view:



Side view:



Mounting dimensions:

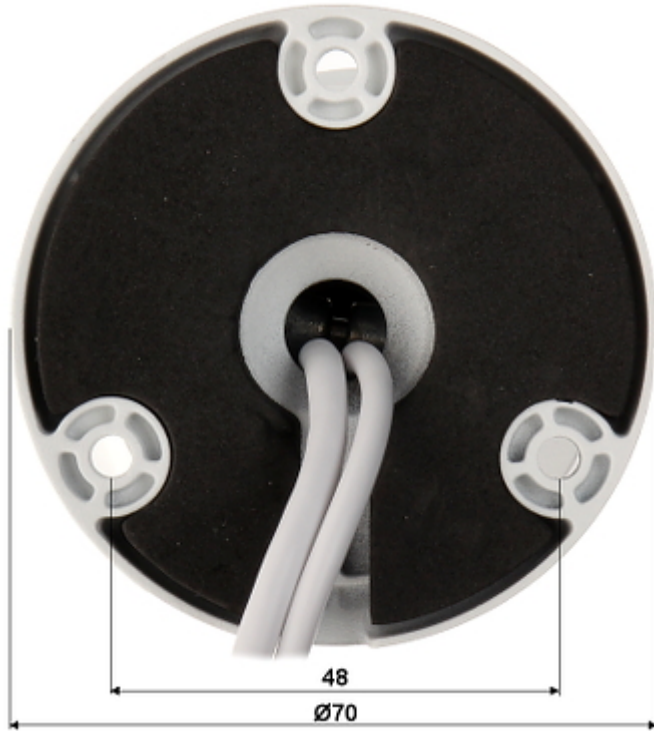

In the kit:



OUR TESTS

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------