

Code: SDI/VGA+A

CONVERTER SDI/VGA+A

Net: 30.28 EUR Gross: 30.28 EUR

Converter allows to connect the SDI devices directly to the monitor or other receiver with VGA input. Additionally an audio signal is sending to two outputs: digital - Coaxial, analog - 2x Cinch.

The device converts signal format from SDI+AUDIO to VGA+AUDIO enabling audio signal separation from SDI signal. The converter has implemented the OSD menu, which can be used to set for example VGA output resolution, RGB components, etc.



SPECIFICATION

Inputs:	1 pcs SDI / HD-SDI / 3G-SDI (BNC socket)
Outputs:	1 pcs VGA (D-Sub 15-pin) 1 pcs SDI/HD-SDI/3G-SDI (BNC socket - loop through) 1 pcs Audio Coaxial 1 pcs Audio stereo (Cinch)
SDI supported standards:	<ul style="list-style-type: none">• SD-SDI: SMPTE 259M-C, 270 Mbps• HD-SDI: SMPTE 292M 1.485 & 1.485 / 1.001 Gb/s• 3G-SDI: SMPTE 424M/425M-AB 2.970 & 2.970 / 1.001 Gb/s
Maximal length of the SDI cable:	3G/HD/SD-SDI to 100 m / 200 m / 300 m
Supported VGA resolutions:	VGA ... WUXGA 480p ... 1080p
ESD protection:	± 8 kV (air-gap discharge) ± 4 kV (contact discharge)
Power supply:	5 V DC / 2.6 A (power adapter included)
Power consumption:	9 W
Operation temp. / Relative humidity:	0 °C ... 40 °C / 20 % ... 90 % (non-condensing)
Weight:	0.470 kg
Dimensions:	180 x 143 x 25 mm
Guarantee:	2 years

PRESENTATION


Converter connectors:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Example of device using:

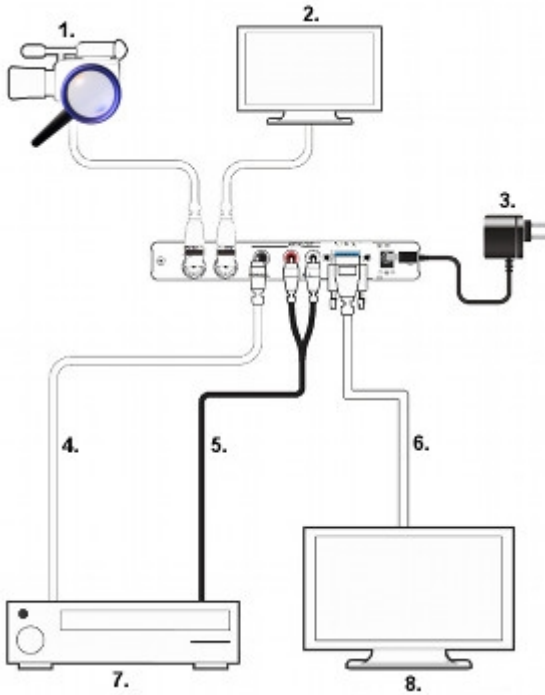

- 1) Camera HD-SDI
 - 2) Monitor SDI
 - 3) Power adapter
 - 4) Audio digital output
 - 5) Audio analog output
 - 6) VGA output
 - 7) Audio amplifier
 - 8) Monitor VGA
- In the kit:



OUR OPINIONS



- Very good signal conversion quality.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

