

Code: TR-4MET

VIDEO BALUN TR-4MET

Net: 42.27 PLN Gross: 42.27 PLN

The TR-4MET is designed to video signal transmission via twisted-pair cable. The device adapts the impedance of coaxial cable 75Ω to the impedance of symmetrical line, ensuring transmission of video signal up to 400m (twisted-pair cable category 5) and eliminates asymmetric interferences. The device has also a DATA connector, which allows to data transmission (e.g. RS-485) via one pair of the twisted-pair cable (connected to the No.1 and No.2 pins of the RJ-45 socket).

Two devices must be used to build a complete channel for signal transmission. It is important to pay attention to linking the adequate terminals: (+) and (-). Reverse connection would cause distortion of image.



SPECIFICATION

Device type:	Passive
Number of channels:	4 pcs Video
Video transmission range:	max. 400 m UTP cat. 5e
Coaxial socket voltage range 75Ω (CVBS):	1 Vpp
Video bandwidth:	0 ... 50 MHz (-3 dB)
Data connector type (DATA):	Cable terminals
Isolation between inputs:	> -50 dB
CMRR (dB @ 5MHz):	50 dB
Coaxial socket impedance:	75 Ω
Symmetrical socket impedance:	100 Ω
Coaxial socket type:	4 x BNC Straight socket
Symmetrical socket type:	RJ-45 (8-pin, 4 pairs) Socket
Operation temp:	0 °C ... 55 °C
Permissible relative humidity:	< 95 %
Weight:	0.125 kg
Dimensions:	103 x 30 x 70 mm
Guarantee:	2 years

PRESENTATION


Front view:



Rear view:




Connection diagram:

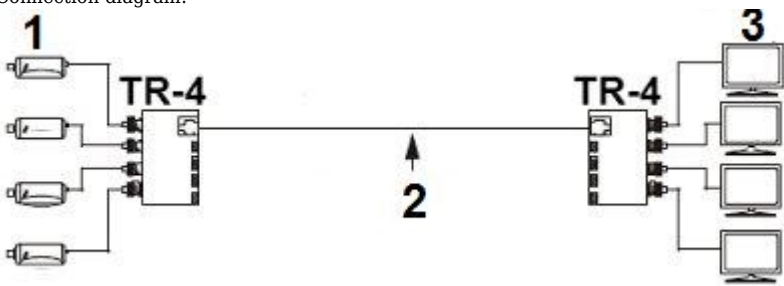

- 1) Cameras
- 2) Twisted-pair cable
- 3) Monitors

Wiring sequence inside the RJ-45 plug. Plug wiring sequence is consistent with the T568B standard:

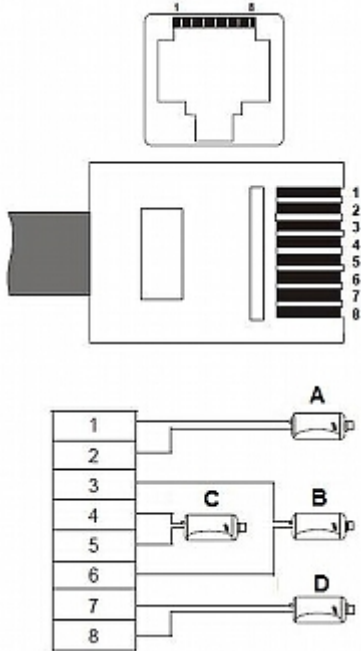

- 1) White/Orange - camera No.1 signal (+)
- (+) DATA signal
- 2) Orange - camera No.1 signal (-)
- (-) DATA signal
- 3) white/green - camera no.2 (+) signal
- 4) blue - camera no. 3 (-) signal
- 5) white/blue - camera no. 3 (+) signal

- 6) green - camera no. 2 (-) signal
- 7) white/brown - camera no. 4 (+) signal
- 8) brown - camera no. 4 (-) signal
- A) Camera 1
- B) Camera 2
- C) Camera 3
- D) Camera 4



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------