


Code: FTP/K6/305M

TWISTED-PAIR CABLE **FTP/K6/305M** CONOTECH

Net: 2.14 PLN Gross: 2.14 PLN

The FTP/K6/305M twisted-pair cable is designed to professional applications of installation. For convenience, cable is marking with length counter printed with 1 m distance step.

The cable complies with the CPR No. 305/2011 directive and meets the requirements of the PN-EN 50575 European standard which specifies requirements in fire conditions, test methods and rating of cables used as building material. The cable has a Declaration of Performance and a CE marking, which confirm its compliance with the guidelines of the CPR regulation.

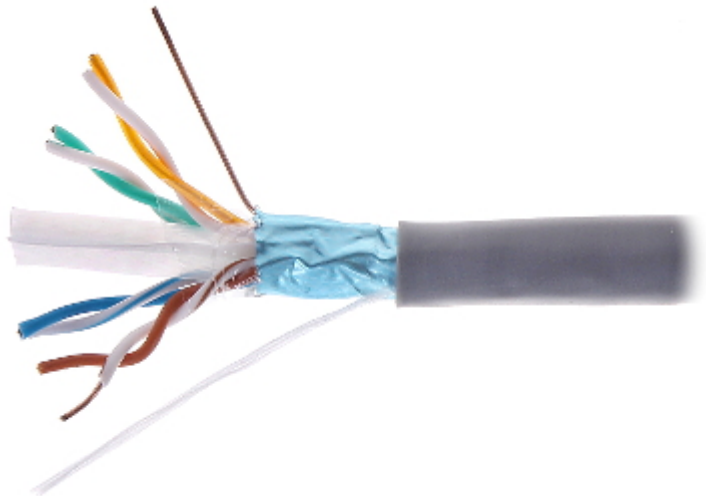

SPECIFICATION


In section:	305 m . Price for 1m when buying a whole roll
Type:	FTP cat. 6, Shielded
Inner conductor:	Ø 0.57 mm, AWG 23, Cu wire
Shield:	PE, Polyester foil, Al foil
Outer coating:	Ø 6.0 mm - PVC
Resistance:	9 Ω / 100 m
Coating color:	Gray
Manufacturer / Brand:	CONOTECH
Guarantee:	2 years

PRESENTATION

Wire gauge:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

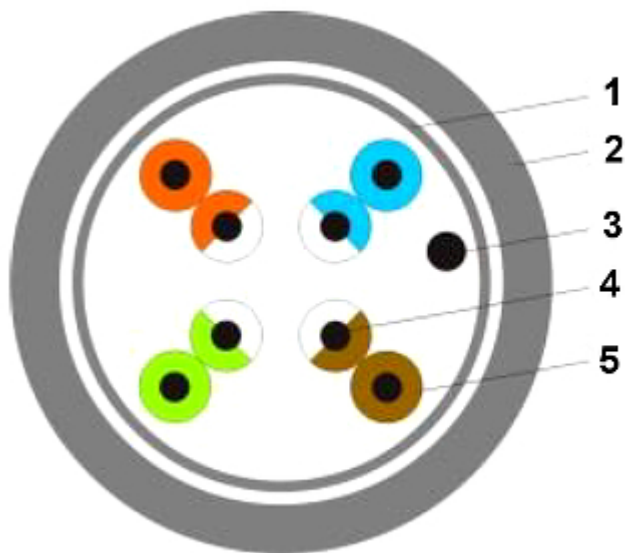

1. Shield
 2. PVC
 3. Grounding
 4. Cu wire
 5. Insulation
- Package:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------