

Code: OMEGA-20P22-12

IP SPEED DOME CAMERA OUTDOOR **OMEGA-20P22-12** ICR - 1080p 3.9 ... 85.5 mm

Net: **619.12 AUD** Gross: **619.12 AUD**

IP camera equipped with very good high resolution sensor. Due to above it is perfect solution for surveillance systems requiring persons or vehicles recognition.

Very easy operation by Internet Explorer browser allows the users to convenient and remote support, and also remote management of the camera. Included camera software enables management and integrated monitoring of many network cameras.

For a few models of IP cameras working at $\geq 1920 \times 1080$ resolution we recommend to use of network with 1Gb/s bandwidth.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.7 " OmniVision Low Illumination CMOS
Digital Image Processor:	Texas Instruments DaVinci DM368
Matrix size:	2 Mpx
Resolution:	1920 x 1080 - 1080p 1280 x 720 - 720p
Scanning system:	Progressive
Lens:	3.9 ... 85.5 mm
View angle:	<ul style="list-style-type: none">• 55 ° ... 3.4 ° (manufacturer data)• 43 ° ... 3.6 ° (our tests result)
Optical zoom:	x 22
Auto IR illuminator:	Adaptive adjusting of the IR illuminator power to the lens zoom and outdoor light conditions
Range of IR illumination:	120 m
S/N ratio:	≥ 50 dB (AGC off)
Video output:	—
Rotation speed (manual control):	0.02 °/s ... 200 °/s (horizontal) 0.02 °/s ... 100 °/s (vertical)
Horizontal rotation range:	360 ° continuous
Vertical rotation range:	0 ° ... 93 °


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

RS-485 interface:	—
Number of presets:	220
Horizontal scan:	✓
Compression:	H.264 / MJPEG
Protections:	Overvoltage
Alarm inputs / outputs:	—
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	TCP/IP, HTTP, FTP, RTSP, UPnP, DNS, NTP, RTP, UDP, IGMP
WEB Server:	Built-in
ONVIF:	2.02
Main features:	<ul style="list-style-type: none"> • ICR - Movable InfraRed filter • AGC - Automatic Gain Control • BLC - configurable Back Light Compensation • Day/Night mode (color/b&w/auto) • IR illuminator optimization
Power supply:	12 V DC / 4 A (power adapter included)
Housing:	Speed Dome, Metal
Color:	White
Operation temp:	-40 °C ... 60 °C
"Index of Protection":	IP66
Weight:	4.54 kg (with bracket)
Dimensions:	330 x 335 x 220 mm (with bracket)
Guarantee:	2 years

PRESENTATION



Bracket dimensions:

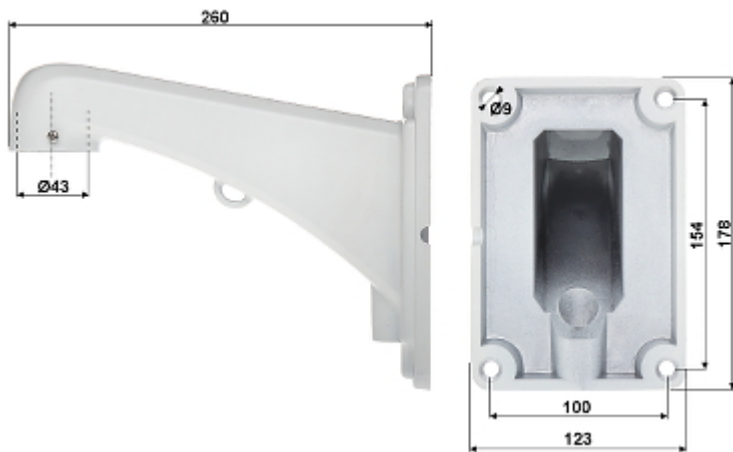

Camera connectors:



In the kit:



OUR TESTS


Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:

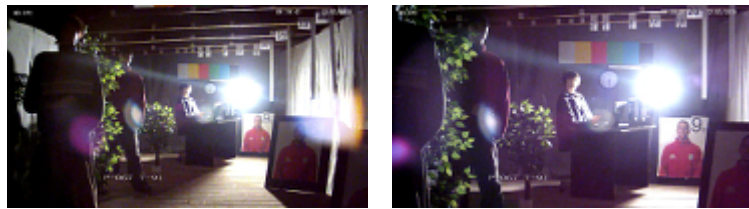

Record from camera during daylight operation:

:

Record from camera during night conditions operation:

:

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------