

Code: GSM-1205

REPEATER GSM **GSM-1205**

Net: **522.04 EUR** Gross: **522.04 EUR**

The GSM-1205 repeater is designed to amplify cellular signals inside the buildings. This device helps you safely amplify the outdoor signals and distribute them inside building.

The device is ideal for hotels, boardinghouses, buildings and other locations where the range of a cellular network allows for use of mobile phones out of buildings, but is insufficient for indoor operation.

The set of devices is sold without the antennas - user should select the antennas type depending on the signal level available outside.

ATTENTION! On Poland territory. Od 13 marca 2012 roku, bez pozwolenia radiowego mogą być używane tylko urządzenia zainstalowane przez przedsiębiorcę telekomunikacyjnego posiadającego ogólnopolską rezerwację częstotliwości wykorzystywanych do świadczenia usług za pomocą stacji bazowych.

Rozporządzenie Ministra Infrastruktury (Dz. U. nr 188 poz.1122).



SPECIFICATION

Frequency band:	880 ... 915 MHz 925 ... 960 MHz
Output power:	20 dB
UP/DL gain:	70 / 70 dB
Max group delay:	0.5 μ s
Manual input attenuation:	0 dB ... 31 dB
Auto Gain Control:	20 dB
Indoor coverage area:	max. 1200 m ²
Impedance:	50 Ω
Connectors:	2 x "N" Socket
Main features:	Plug & Play
Supported norms:	PN-ETSI EN 300 609-4 v.8.0.2:2005, CE, RoHS
Weight:	1.22 kg
Dimensions:	218 x 155 x 65 mm
Guarantee:	2 years

PRESENTATION

Front view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Rear view:




Bottom view:



In the kit:



Example of application:

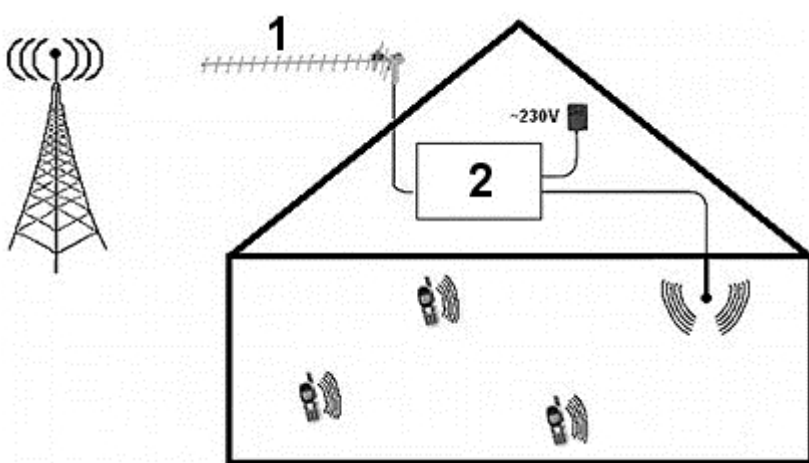

1) antenna for example ATK-20/850-960

2) GSM repeater

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------