

Code: KX10DPHT-WE

WIRELESS PIR DETECTOR **KX10DPHT-WE** PYRONIX

Net: 209.00 PLN Gross: 209.00 PLN

Wireless motion detector, which is designed to detect the moving intruder within the system protected area. Thanks to pet immunity, the KX10DPHT-WE can provide protection even when small pets are moving around during surveillance.



SPECIFICATION

Equivalent to Hikvision:	DS-PD2-P10P-W
Support:	Wireless alarm systems PYRONIX Enforcer
Battery power supply:	1 x CR123A - alkaline battery (included)
Battery lifetime:	~ 2 years
Frequency range:	868 MHz
Radio communication range (at open area):	max. 1600 m
Recommended installation height:	1.8 ... 2.4 m
Detection angle / Detection range:	85 ° / 10 m (basic lens)
Digital temperature compensation:	✓
Pet immunity:	max. 25 kg
Environment class:	II
Main features:	<ul style="list-style-type: none">• Digital detector• Quad Sensor• High immunity to false alarms thanks to the Blue Wave technology• Advanced temperature compensation• Tamper protection (detection of removing from mounting surface and enclosure opening)• Test mode
Operation temp:	-10 °C ... 50 °C
Dimensions:	117 x 69 x 50 mm
Weight:	0.127 kg

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Compliance with standards:	EN 50131-3 EN50131-2-2 Grade 2 EN 50130-4 EN 50131-5-3 EN 50131-2-2
Manufacturer / Brand:	PYRONIX
SAP Code:	361300015
Manufacturer's code:	KX10DP-WE
Guarantee:	2 years

PRESENTATION

Internal view of the housing:





Mounting side view:





Detector range:

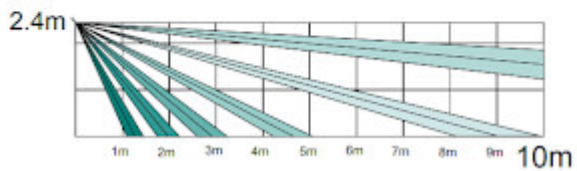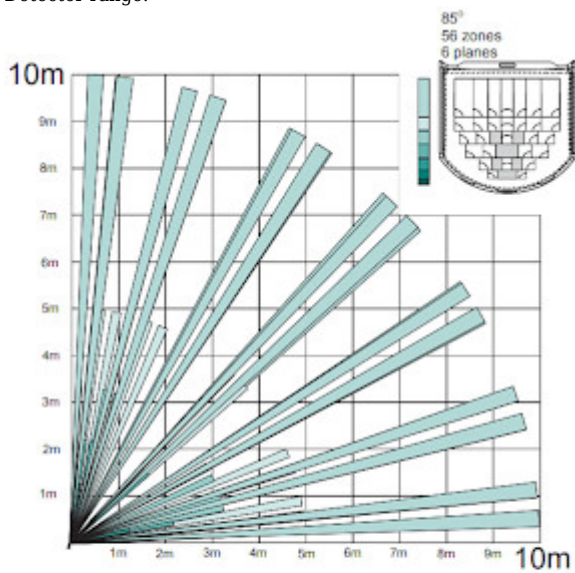

In the kit:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60