

Code: JA-88P

WIRELESS PIR DETECTOR **JA-88P** JABLOTRON

Price visible after login

The JA-88P is outdoor, wireless, dual zone PIR detector based on an outdoor detector by OPTEX supplemented with a transmitter compatible with OASiS systems. In order to obtain reliable detection, OPTEX company developed a high precision optical system and a quite new pyro-element, which together create configuration area with 94 detection zones with the same density, both near the detector and at the end of its nominal range. The use of the newest technologies, which are a breakthrough in the field of PIR detectors, the JA-88P device is one of the best among detection systems. Offered solutions meet the customers and installers needs.

The JA-88P detector utilizing the AND detection pattern technology - upper and lower detection areas have to be activated in order to generate an alarm condition. The primary detection zone configuration prevents false alarms caused by pets or small animals. Modular unit makes the device easy to install, and the terminals and configuration switches arrangement is very useful for installers, which ensures quick cables installation and easy access to all switches.



SPECIFICATION

Support:	JABLOTRON 80
Power supply:	3 Lithium batteries LS(T)14500 (AA 3.6 V 2000 mAh) - included
Battery lifetime:	about 3 years (at 120 s sleep time)
Frequency range:	868 MHz OASiS protocol
Radio communication range (at open area):	about 300 m
Detection angle / Detection range:	85 ° / 12 m
Recommended installation height:	2.5 ... 3 m
Environment class:	IV according to EN 50131-1
"Index of Protection":	IP55
Operation temp:	-20 °C ... 60 °C
Compliance with standards:	EN 50131-1, EN 50131-2-2, EN 50131-5-3, It can be used according to CTU VO-R/10/06.2009-9
Main features:	• Wide-angle detection characteristics • Patented active "Anti-Masking" technology • Range 12 x 12 m • 2 PIR detectors • Intelligent AND logic • Advanced temperature compensation • Summer Night Compensation Logic algorithm • Vegetation sway analysis logic
Weight:	0.620 kg
Dimensions:	266 x 99 x 205 mm (with bracket)

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Manufacturer / Brand:	JABLOTRON
Guarantee:	2 years

PRESENTATION

Detector without assembled bracket and protection hood:




View after remove the lens (both detectors are visible):




Detector removed from the housing (terminals and place for batteries visible):




Detection range depending on various installation heights (2.5 and 3 m):

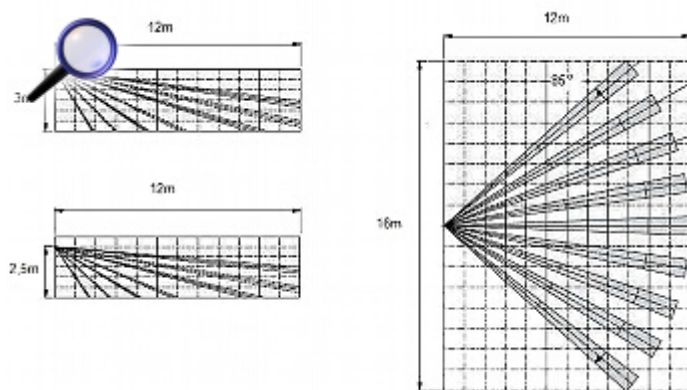

The detector with bracket can be adjusted in following ranges:

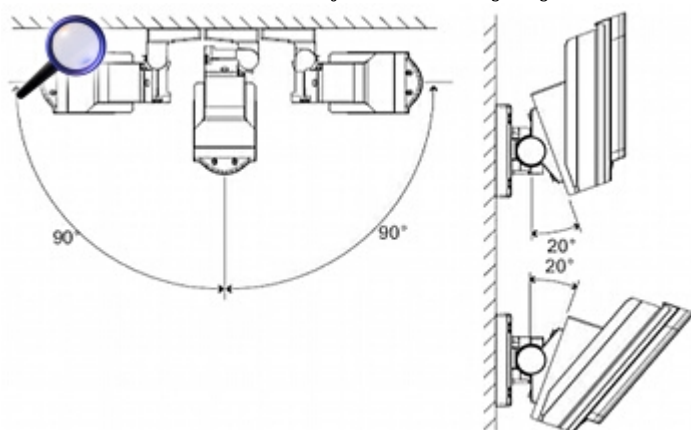

Dimensions with bracket:

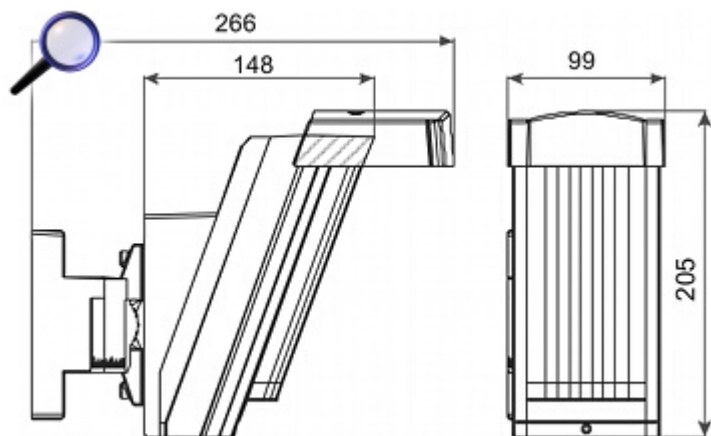

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------