

Code: NVR2104-P-S3

NVR **NVR2104-P-S3** 4 CHANNELS, 4 PoE DAHUA

Net: **381.15 AUD** Gross: **381.15 AUD**



SPECIFICATION

Standard:	TCP/IP
Supported resolutions:	max. 12 Mpx
Video outputs:	1 pcs HDMI 1 pcs VGA
Audio support:	4 Channels - Audio from cameras
Audio inputs:	1 pcs CINCH
Audio outputs:	1 pcs CINCH
Image compression method:	H.265+ / H.265 / H.264+ / H.264
Supported hard drives:	1 x 16 TB SATA III
Recording modes:	Manual, Motion Detection, Schedule
Network protocols:	HTTP, HTTPS, TCP/IP, IPv4, RTSP, UDP, NTP, DHCP, DNS, SMTP, UPnP, IP Filter, DDNS, Alarm Server, IP Search, P2P, ONVIF
External storage devices backup:	Backup to USB drive (pendrive, external drive)
Searching and playback the records:	Records searching: by time and events type. Records playback: forward, backward, fast, slow "Frame by Frame" playback function
Bitrate:	max. 80 Mbps
Network functions:	Full support via network, Remote records copying, Web-Server built-in
ONVIF:	✓
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application DMSS • iOS (iPhone): Free application DMSS See how to configure the P2P function in Dahua recorders and how to enable the mobile application
Default IP address:	192.168.1.108
Default admin user / password:	admin / - The administrator password should be set at the first start

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
RTSP URL:	rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream
Alarm inputs / outputs:	—
PTZ control:	✓
Motion Detection:	✓
USB:	2 pcs USB 2.0
Intelligent image analysis:	✓
Mouse support:	✓
IR remote controller in the set:	—
Main features:	<p>Functions implemented in cooperation between the recorder and cameras that support these functions</p> <ul style="list-style-type: none"> • Advanced peripheral protection functions: intrusion, crossing line with separate rules for vehicles and pedestrians, • SMD PLUS - searching for an object classified as: human, motor vehicle, non-motor vehicle, • Privacy zones
Switch PoE:	4-port PoE Switch built-in, 25.5 W / Channel - PoE (802.3af/at), max. 36 W (total)
Power supply:	53 V DC / 1.22 A (power adapter included)
Weight:	0.48 kg
Dimensions:	205 x 206 x 46 mm
Supported languages:	Polish, English
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Top view:




Rear panel:




In the kit:



Example captures of device interface:

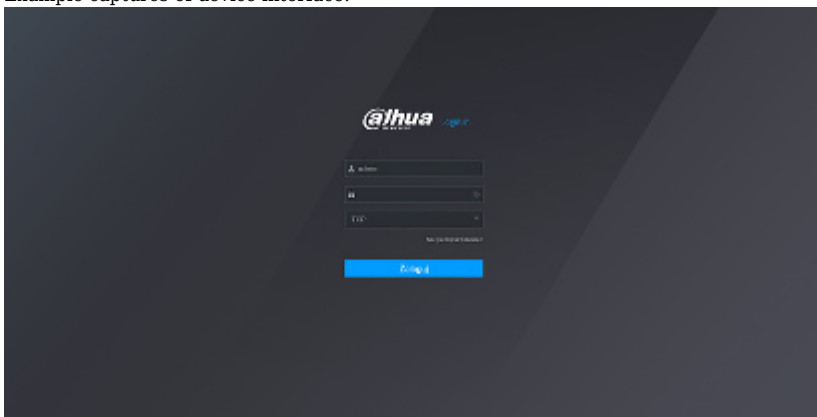

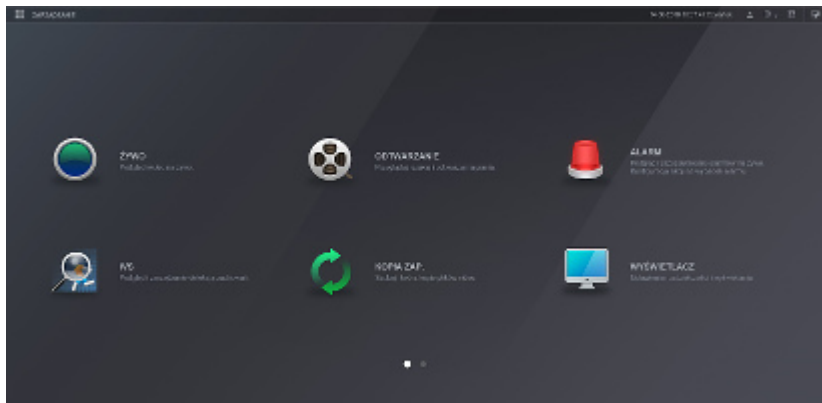

OUR OPINIONS



- Audio transmission via network.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60