

Code: DHI-NVR4108-8P-4KS2

# NVR **DHI-NVR4108-8P-4KS2** 8 CHANNELS +8-PORT SWITCH POE DAHUA

Net: **291.53 EUR** Gross: **291.53 EUR**



## SPECIFICATION

|                                     |                                                                                                                                                                                                                                  |
|-------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Standard:                           | TCP/IP                                                                                                                                                                                                                           |
| Supported resolutions:              | 8 @ 3840 x 2160 px,<br>8 @ 3072 x 2048 px,<br>8 @ 2592 x 1944 px,<br>8 @ 2560 x 1440 px,<br>8 @ 2048 x 1536 px,<br>8 @ 1920 x 1080 px,<br>8 @ 1280 x 720 px,<br>8 @ 704 x 576 px                                                 |
| Video outputs:                      | 1 pcs HDMI<br>1 pcs VGA                                                                                                                                                                                                          |
| Audio support:                      | 8 Channels - Audio from cameras                                                                                                                                                                                                  |
| Audio inputs:                       | 1 pcs CINCH - External microphone input                                                                                                                                                                                          |
| Audio outputs:                      | 1 pcs CINCH                                                                                                                                                                                                                      |
| Image compression method:           | H.265 / H.264 / MJPEG                                                                                                                                                                                                            |
| Maximal total frame rate:           | 200 fps @ 3840 x 2160 px,<br>200 fps @ 3072 x 2048 px,<br>200 fps @ 2592 x 1944 px,<br>200 fps @ 2560 x 1440 px,<br>200 fps @ 2048 x 1536 px,<br>200 fps @ 1920 x 1080 px,<br>200 fps @ 1280 x 720 px,<br>200 fps @ 704 x 576 px |
| Supported hard drives:              | 1 x 6 TB SATA                                                                                                                                                                                                                    |
| Recording modes:                    | Manual, Motion Detection, Schedule                                                                                                                                                                                               |
| Network protocols:                  | HTTP, HTTPS, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, DDNS, IP Filter, PPPoE, FTP, IP Search, ONVIF 2.4                                                                                                         |
| External storage devices backup:    | Backup to USB drive (pendrive, external drive)                                                                                                                                                                                   |
| Searching and playback the records: | Records searching: by time and events type. Records playback: forward, backward, fast, slow<br>Advanced searching (to the one second accuracy)<br>All channels synchronous playback, Smart Search function                       |
| Bitrate:                            | max. 80 Mbps                                                                                                                                                                                                                     |

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

|                                  |                                                                                                                                                                                                                                                                                                                                                                         |
|----------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Network functions:               | Full support via network, Remote records copying, Web Server built-in max. 128 on-line users                                                                                                                                                                                                                                                                            |
| ONVIF:                           | 2.4                                                                                                                                                                                                                                                                                                                                                                     |
| Mobile phones support:           | Port no.: 37777 or access by a cloud (P2P)<br>• Android: Free application <a href="#">DMSS</a> , Android: Free application <a href="#">IMOU</a><br>• iOS (iPhone): Free application <a href="#">DMSS</a> , iOS (iPhone): Free application <a href="#">IMOU</a><br><br>See how to configure the P2P function in Dahua recorders and how to enable the mobile application |
| Default admin user / password:   | admin / admin                                                                                                                                                                                                                                                                                                                                                           |
| Default IP address:              | 192.168.1.108                                                                                                                                                                                                                                                                                                                                                           |
| Web browser access ports:        | 80, 37777                                                                                                                                                                                                                                                                                                                                                               |
| PC client access ports:          | 37777                                                                                                                                                                                                                                                                                                                                                                   |
| Switch PoE:                      | 8-port PoE Switch built-in, 25.5 W / Channel, PoE (802.3af/at)                                                                                                                                                                                                                                                                                                          |
| Mobile client access ports:      | 37777                                                                                                                                                                                                                                                                                                                                                                   |
| Maximum total switch load:       | 80 W (at full load)                                                                                                                                                                                                                                                                                                                                                     |
| RTSP URL:                        | rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream<br>rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream                                                                                                                                                                                         |
| Alarm inputs / outputs:          | —                                                                                                                                                                                                                                                                                                                                                                       |
| PTZ control:                     | IP Speed Dome Cameras                                                                                                                                                                                                                                                                                                                                                   |
| Motion Detection:                | 22 x 18 motion zones - after motion detection records detected channels only                                                                                                                                                                                                                                                                                            |
| Intelligent image analysis:      | ✓                                                                                                                                                                                                                                                                                                                                                                       |
| Mouse support:                   | ✓                                                                                                                                                                                                                                                                                                                                                                       |
| IR remote controller in the set: | —                                                                                                                                                                                                                                                                                                                                                                       |
| Power supply:                    | 48 V DC / 2 A (power adapter included)                                                                                                                                                                                                                                                                                                                                  |
| Weight:                          | 0.50 kg                                                                                                                                                                                                                                                                                                                                                                 |
| Dimensions:                      | 270 x 205 x 46 mm                                                                                                                                                                                                                                                                                                                                                       |
| Supported languages:             | English, Polish                                                                                                                                                                                                                                                                                                                                                         |
| Country of origin:               | China                                                                                                                                                                                                                                                                                                                                                                   |
| Manufacturer / Brand:            | DAHUA                                                                                                                                                                                                                                                                                                                                                                   |
| Guarantee:                       | <b>3 years</b>                                                                                                                                                                                                                                                                                                                                                          |

## PRESENTATION

Top view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
 POL; 60-713 Poznań; Graniczna 10  
 e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60




Rear panel:




In the kit:



Example captures of device interface:

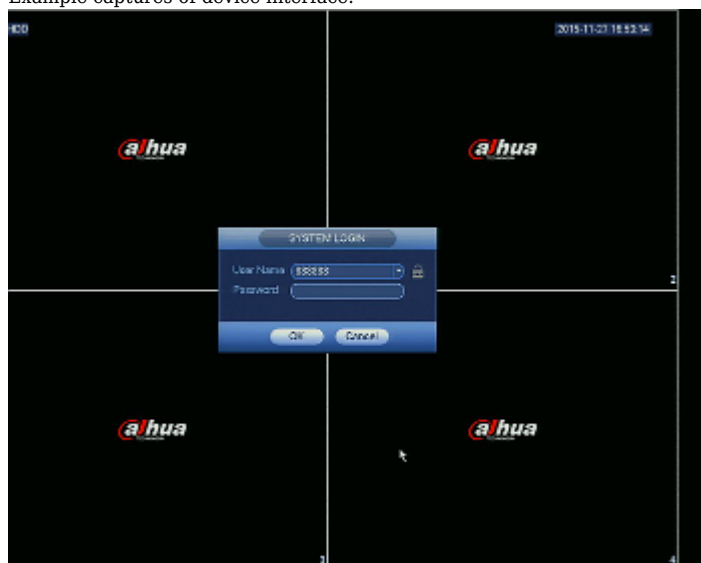

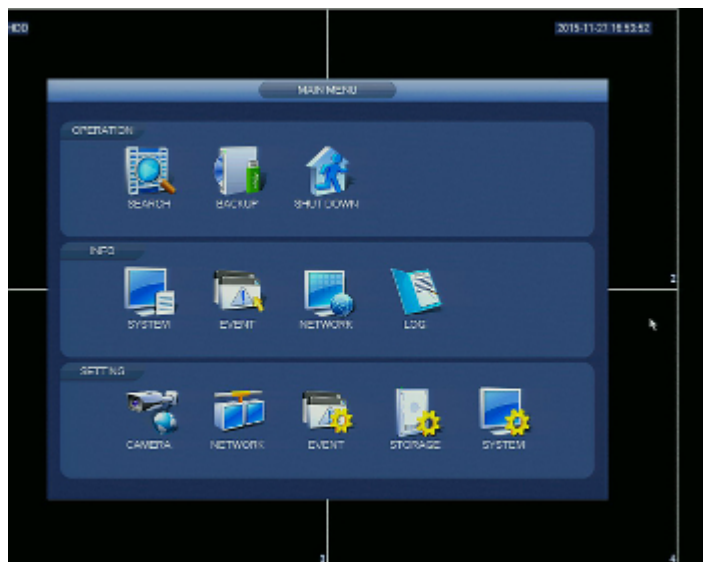

## OUR OPINIONS



- Audio transmission via network.

## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|