

Code: DS-7108NI-K1/W/M(C)

NVR DS-7108NI-K1/W/M(C) Wi-Fi, 8 CHANNELS Hikvision

Net: 4 603.08 CZK Gross: 4 603.08 CZK

The DS-7108NI-K1/W/M(C) digital recorder is a professional device using in IP surveillance systems. The H.265 / H.264 video compression standard using to record video data, allows to get the best possible quality of recorded image at minimal network transfer and disk storage capacity.

The built-in Wi-Fi module enables cooperation with wireless cameras that support the IEEE 802.11 b/g/n standards.



SPECIFICATION

Standard:	TCP/IP
Supported resolutions:	max. 4 Mpx - 2688 x 1520 px
Video outputs:	1 pcs HDMI 1 pcs VGA
Audio support:	8 Channels - Audio from cameras
Audio inputs:	—
Audio outputs:	1 pcs CINCH
Image compression method:	H.265+ / H.265 / H.264+ / H.264
Supported hard drives:	1 x 6 TB SATA
Recording modes:	Manual, Motion Detection, Schedule
Network protocols:	TCP/IP, DHCP, Hik-Connect, DNS, DDNS, NTP, SADP, SMTP, UPnP
External storage devices backup:	Backup to USB drive (pendrive, external drive)
Searching and playback the records:	Records searching: by time and events type. Records playback: forward, backward, fast, slow
Bitrate:	max. 50 Mbps
Network functions:	<ul style="list-style-type: none">• Wi-Fi - IEEE 802.11 b/g/n, 2.4 GHz, 2x2 MIMO, 144 Mbps Baudrate• Live image view, Playback the records, Backup the records - iVMS-4200 application
ONVIF:	✓
Mobile phones support:	Port no.: 8000 or access by a cloud (P2P) <ul style="list-style-type: none">• Android: Free application iVMS-4500 or Hik-Connect• iOS (iPhone): Free application iVMS-4500 or Hik-Connect

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Default admin user / password:	admin / - The administrator password should be set at the first start
Default IP address:	192.168.1.64
Web browser access ports:	80
PC client access ports:	Port no.: 8000 or access by a cloud (P2P) - iVMS-4200 application
Mobile client access ports:	8000
RTSP URL:	<ul style="list-style-type: none"> • rtsp://user:password@192.168.1.64:554/Streaming/Channels/channel_no01/ - Main stream • rtsp://user:password@192.168.1.64:554/Streaming/Channels/channel_no02/ - Sub stream
Alarm inputs / outputs:	—
PTZ control:	IP Speed Dome Cameras
Motion Detection:	✓
Intelligent image analysis:	✓
USB:	2 pcs USB 2.0
Mouse support:	✓
IR remote controller in the set:	—
Operation temp:	-10 °C ... 55 °C
Power supply:	12 V DC / 2 A (power adapter included)
Power consumption:	≤ 10 W (without HDD)
Weight:	0.9 kg
Dimensions:	260 x 246 x 48 mm
Supported languages:	Polish, English, Bulgarian, Croatian, Czech, Danish, Estonian, French, Greek, Spanish, Dutch, Lithuanian, Latvian, German, Norwegian, Portuguese, Russian, Romanian, Serbian, Slovak, Slovenian, Swedish, Turkish, Hungarian, Italian
Country of origin:	China
Manufacturer / Brand:	Hikvision
SAP Code:	303611924
Guarantee:	3 years

PRESENTATION

Front panel:



Rear panel:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



See how to mount a hard disk drive and configure the recorder:

:

In the kit:

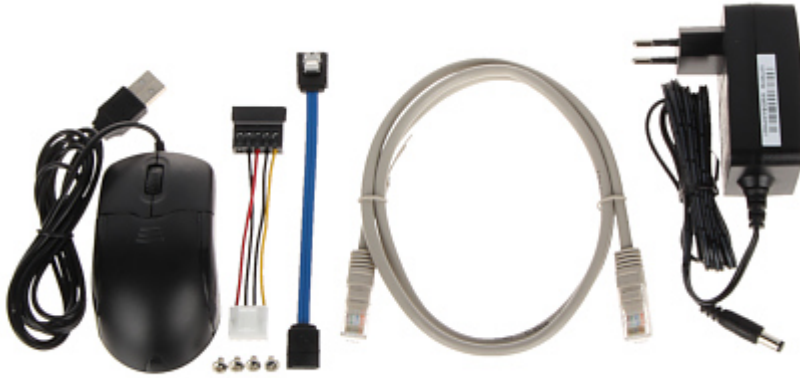

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------