

Code: NVR4108HS-8P-4KS2/L+2TB

PROMOTIONAL SET NVR + HDD **NVR4108HS-8P-4KS2/L+2TB 8 CHANNELS DAHUA**

Net: **1 886.97 PLN** Gross: **1 886.97 PLN**

Promotional set for the NVR4108HS-8P-4KS2/L recorder with the HDD-ST2000VX007 hard disk.

The NVR4108HS-8P-4KS2/L+ digital recorder is a professional device applicable in surveillance systems. The H.265 / H.264 video compression standard using to record video data, allows to get the best possible quality of recorded image at minimal network transfer and disk storage capacity. The menu options layout has been designed for all users, even beginners can easy navigate and change parameters in DVR settings without any problem.

The disk is designed for reliable 24-hour operation in CCTV surveillance systems. Serial ATA interface connection.



SPECIFICATION

Standard:	TCP/IP
Supported resolutions:	max. 8.3 Mpx, 4K UHD - 3840 x 2160 px,
Video outputs:	1 pcs HDMI 4K 1 pcs VGA
Audio support:	8 Channels - Audio from cameras
Audio inputs:	1 pcs CINCH
Audio outputs:	1 pcs CINCH
Image compression method:	H.265+ / H.265 / H.264+ / H.264 / MJPEG
Supported hard drives:	1 x 10 TB SATA III
Recording modes:	Manual, Motion Detection, Schedule
Network protocols:	HTTP, HTTPS, TCP/IP, IPv4/IPv6, UPnP, SNMP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, DDNS, FTP, Alarm Server, IP Search, P2P, Auto Register, ONVIF
External storage devices backup:	Backup to USB drive (pendrive, external drive)
Searching and playback the records:	Records searching: by time and events type. Records playback: forward, backward, fast, slow "Frame by Frame" playback function
Bitrate:	max. 80 Mbps
Network functions:	Full support via network, Remote records copying, Web Server built-in
ONVIF:	✓
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) • Android: Free application DMSS • iOS (iPhone): Free application DMSS See how to configure the P2P function in Dahua recorders and how to enable the mobile application

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Default IP address:	192.168.1.108
Default admin user / password:	admin / - The administrator password should be set at the first start
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
RTSP URL:	rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream
Alarm inputs / outputs:	—
PTZ control:	✓
Motion Detection:	✓
USB:	2 pcs USB 2.0
Main features:	Functions implemented in cooperation between the recorder and cameras that support these functions • Advanced peripheral protection functions: intrusion, crossing line with separate rules for vehicles and pedestrians, • classification of people and vehicles, • face detection, • people counting, • SMD PLUS - searching for an object classified as: human, motor vehicle, non-motor vehicle
Mouse support:	✓
IR remote controller in the set:	—
Switch PoE:	8-port PoE Switch built-in, 25.5 W / Channel - PoE (802.3af/at), max. 72 W (total)
Power supply:	53 V DC / 1.8 A (power adapter included)
Weight:	0.91 kg
Dimensions:	260 x 233 x 48 mm
Supported languages:	English, Polish
Country of origin:	China
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

HDD FOR DVR:

Capacity:	2 TB
Interface:	SATA 6 Gb/s
Size format:	3.5 "
Technology:	• Built-in data recovery function for uninterrupted video streaming • ATA AV Command support - video streams commands support
Designed to continuous operation 24/7:	✓
Weight:	0.39 kg
Manufacturer / Brand:	SEAGATE
Guarantee:	2 years

PRESENTATION

DVR:

Front panel:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60




Rear panel:




In the kit:



Example captures of device interface:

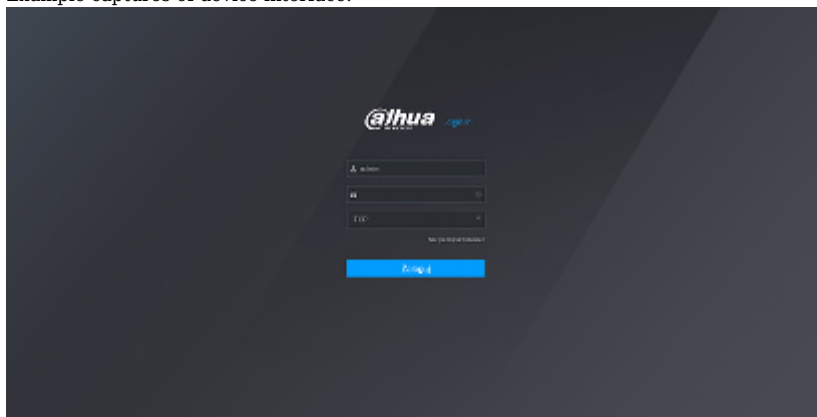

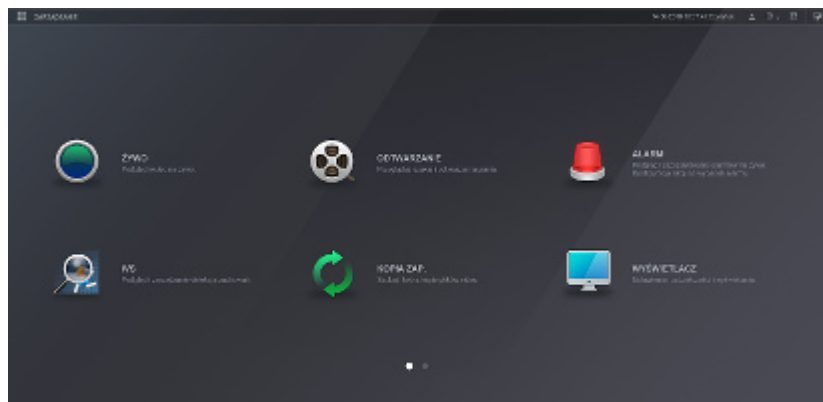

HDD FOR DVR:

Top view:



The Seagate drives marked with SkyHawk Lite symbol are dedicated to work in small video systems. The disc design ensures stable operation for 24 hours a day.

Connectors:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

