

Code: DHI-NVR5424-24P-4KS2

NVR **DHI-NVR5424-24P-4KS2** 24 CHANNELS +eSATA +24-PORT SWITCH POE DAHUA

Net: **1 125.83 EUR** Gross: **1 125.83 EUR**



SPECIFICATION

Standard:	TCP/IP
Supported resolutions:	24 @ 4000 x 3000 px, 24 @ 3840 x 2160 px, 24 @ 3072 x 2048 px, 24 @ 2592 x 1944 px, 24 @ 2560 x 1440 px, 24 @ 2048 x 1536 px, 24 @ 1920 x 1080 px 24 @ 1280 x 720 px 24 @ 704 x 576 px
Video outputs:	2 pcs HDMI 1 pcs VGA
Audio support:	24 Channels - Audio from cameras
Audio inputs:	1 pcs Microphone, CINCH
Audio outputs:	1 pcs CINCH
Image compression method:	H.265 / H.265+ / H.264 / H.264+ / MJPEG
Maximal total frame rate:	600 fps @ 4000 x 3000 px, 600 fps @ 3840 x 2160 px, 600 fps @ 3072 x 2048 px, 600 fps @ 2592 x 1944 px, 600 fps @ 2560 x 1440 px, 600 fps @ 2048 x 1536 px, 600 fps @ 1920 x 1080 px, 600 fps @ 1280 x 720 px, 600 fps @ 704 x 576 px
Supported hard drives:	4 x 8 TB SATA III + 1 eSATA
Recording modes:	Manual, Sensor, Motion detection, Schedule
Network protocols:	HTTP, HTTPS, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, IP Search, ONVIF
External storage devices backup:	Backup to USB drive (pendrive, external drive), eSATA
Searching and playback the records:	Records searching: by time and events type. Records playback: forward, backward, fast, slow Advanced searching (to the one second accuracy) All channels synchronous playback, Smart Search function
Bitrate:	max. 320 Mbps

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Network functions:	Full support via network, Remote records copying, Web-Server built-in max. 128 on-line users
ONVIF:	2.4
Mobile phones support:	Port no.: 37777 or access by a cloud (P2P) <ul style="list-style-type: none"> • Android: Free application DMSS • iOS (iPhone): Free application DMSS See how to configure the P2P function in Dahua recorders and how to enable the mobile application
Default IP address:	192.168.1.108
Default admin user / password:	admin / admin
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
RTSP URL:	rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream
Maximal outputs load:	210 W
Alarm inputs / outputs:	16 / 6
PTZ control:	✓
Motion Detection:	22 x 18 motion zones
Intelligent image analysis:	✓
Mouse support:	✓
IR remote controller in the set:	—
Switch PoE:	24-port PoE Switch built-in, 25.5 W / Channel, PoE (802.3af/at)
Power supply:	230 V AC
Weight:	4.76 kg
Dimensions:	440 x 413 x 75 mm
Supported languages:	English, Polish
Country of origin:	China
Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Front panel:



Rear panel:





In the kit:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Example captures of device interface:

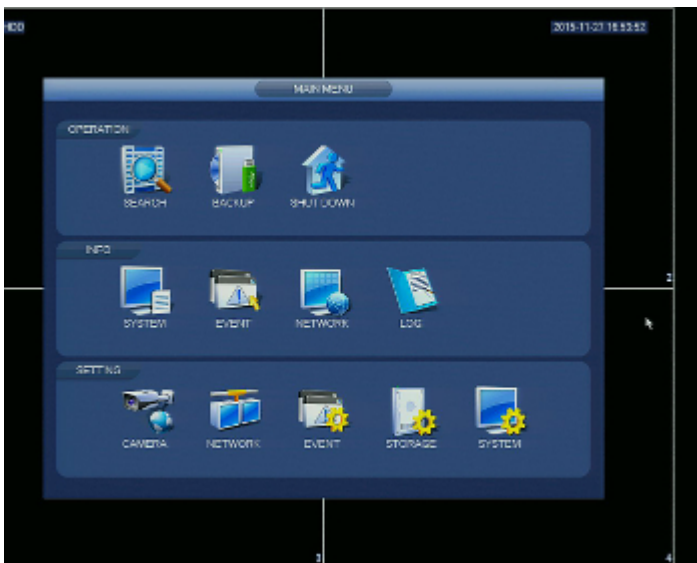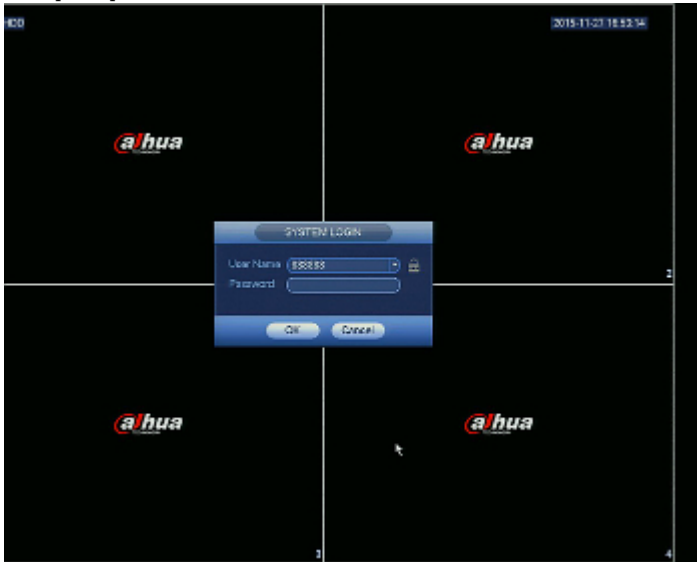

OUR OPINIONS



- Audio transmission via network.
- The DHI-NVR5424-24P-4KS2 is equipped with USB 3.0 port allowing to fast records backup.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60