

Code: NVR608RH-64-XI

NVR **NVR608RH-64-XI** 64 CHANNELS WizMind DAHUA

Net: **5 871.14 EUR** Gross: **5 871.14 EUR**

NVR equipped with advanced functions of intelligent image analysis.



SPECIFICATION

Standard:	IP
Supported resolutions:	max. 32 Mpx
Video outputs:	<ul style="list-style-type: none">• 2 pcs HDMI 4K• 1 pcs HDMI 8K• 1 pcs HDMI• 2 pcs VGA
Audio support:	<ul style="list-style-type: none">• 64 Channels - Audio from cameras,• Bi-directional audio streaming support
Audio inputs:	1 pcs CINCH
Audio outputs:	2 pcs CINCH
Image compression method:	Smart H.265+ / H.265 / Smart H.264+ / H.264 / MPEG-4 / MJPEG
Bitrate:	max. 1280 Mbps
Supported hard drives:	8 x 16 TB SATA + 1 x eSATA , Raid 0/1/5/6/10
Recording modes:	Manual, Sensor, Motion detection, Schedule
External storage devices backup:	Backup to USB drive (pendrive, external drive)
Searching and playback the records:	<ul style="list-style-type: none">• Records searching: by time and events type. Records playback: forward, backward, fast, slow• Advanced searching (to the one second accuracy)• Records playback from max. 16 channels in the same time
Network interface:	2 x RJ-45 10/100/1000/2500 Base-TX
Network functions:	Full support via network, Remote records copying, Web-Server built-in
ONVIF:	✓
Default IP address:	192.168.1.108
Default admin user / password:	admin / - The administrator password should be set at the first start

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Mobile phones support:	<p>Port no.: 37777 or access by a cloud (P2P)</p> <ul style="list-style-type: none"> • Android: Free application DMSS • iOS (iPhone): Free application DMSS <p>See how to configure the P2P function in Dahua recorders and how to enable the mobile application</p>
Web browser access ports:	80, 37777
PC client access ports:	37777
Mobile client access ports:	37777
RTSP URL:	<ul style="list-style-type: none"> • rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=0 - Main stream • rtsp://admin:haslo@192.168.1.108:554/cam/realmonitor?channel=1&subtype=1 - Sub stream
USB:	<ul style="list-style-type: none"> • 2 pcs USB 2.0 • 2 pcs USB 3.0
Serial ports:	RS-485, RS-232
Alarm inputs / outputs:	16 / 8
PTZ control:	<ul style="list-style-type: none"> • IP Speed Dome Cameras • RS-485 - PELCO-D/P and others
Intelligent image analysis:	✓
Motion Detection:	✓
Main features:	<ul style="list-style-type: none"> • Intelligent image analysis : IVS analysis - 10 rules, scene changing, face detection, • SMD PLUS - searching for an object classified as: human, motor vehicle, non-motor vehicle • Filtering of false alarms based on the recognition of persons and vehicles • Face recognition - supports 6 types of facial attributes extraction • Face recognition and analysis in real time (up to 16 photos per second) • Support for up to 40 face databases, including 300 000 face images • metadata handling - automatic photo taking and collection of information enabling the subsequent identification of people and vehicles that triggered the alarm (clothing, silhouette, face, features of motor and non-mechanical vehicles) • AcuPick support - technology that uses artificial intelligence on both front-end and back-end to search through massive amounts of video data to quickly locate targets with high precision • EPTZ - advanced target detection and tracking algorithms that trigger alarms - can simultaneously zoom and track many people and/or vehicles <p>Functions implemented in cooperation between the recorder and cameras that support these functions :</p> <ul style="list-style-type: none"> • ANPR • Authorized and unauthorized license plate lists: up to 20 000 records • counting people / vehicles • crowd gathering estimation • heat map
Mouse support:	✓
IR remote controller in the set:	—
Switch PoE:	—
Power supply:	<ul style="list-style-type: none"> • 100 ... 240 V AC @ 50 / 60 Hz • Redundant power supply
Power consumption:	max. 18 W (without HDD)
Operation temp:	-10 °C ... 55 °C
Weight:	8.14 kg
Dimensions:	444 x 476 x 95 mm
Supported languages:	Polish, English
Manufacturer / Brand:	DAHUA



Guarantee:

3 years

PRESENTATION



Front panel:



Rear panel:



Example captures of device interface:

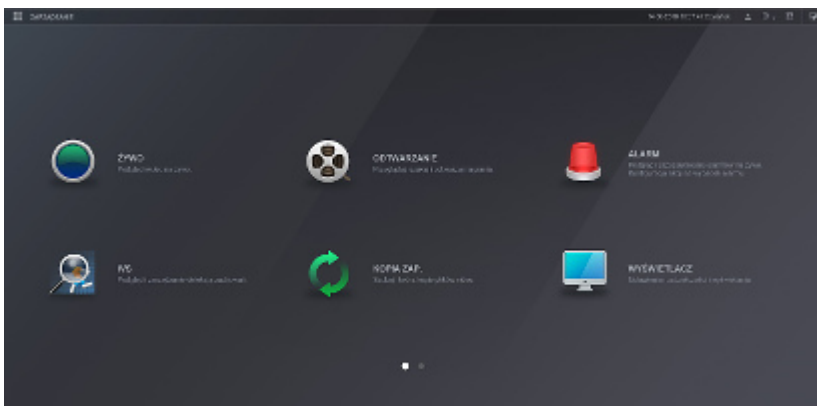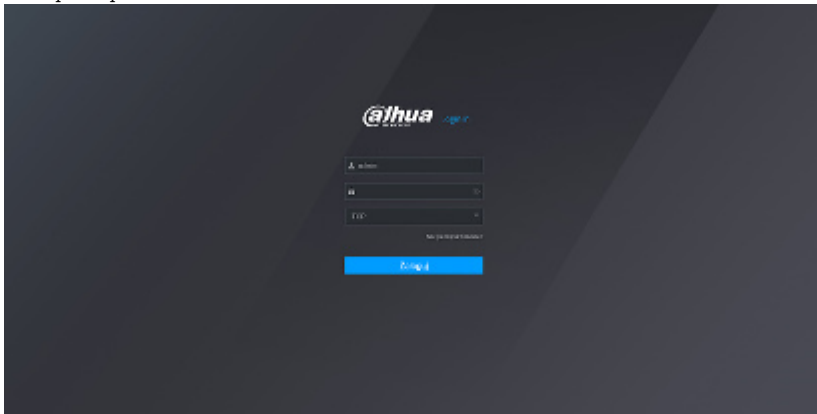

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60