

Code: DS-PWA32-HSR

## WIRELESS ALARM CONTROL PANEL **DS-PWA32-HSR** Hikvision

Net: **1 297.00 PLN** Gross: **1 297.00 PLN**

The DS-PWA32-HSR wireless alarm control panel supports 32 wireless alarm inputs and 32 wireless outputs. In addition, the device allows to handle max. 2 wireless sirens and up to 8 remote controls.



### SPECIFICATION

|  |   |
|--|---|
| Number of supported wireless detectors:            | max. 32 pcs   |
| Number of supported remote control keyfobs:        | max. 8 pcs  |
| The RFID cards/keyfobs support:                    | max. 12 pcs, In the kit : 5 pcs   |
| Number of supported wireless sirens:               | max. 2 pcs (not included)   |
| Operating frequency range of the wireless devices: | 868 MHz   |
| Operating range in open area:                      | max. 800 m  |
| Partitions:  | 1 pcs   |
| Timers:  | —   |
| Users + admins:                                    | 11 + 2  |
| Keyboard included:                                 | —   |
| Expander included :                                | —   |
| Built-in modules:                                  | <ul style="list-style-type: none"><li>• Wi-Fi Module IEEE 802.11 b/g/n, 2.4 GHz</li><li>• LAN, 10/100Mb</li><li>• GPRS, 3/4G Module - It supports push messages, SMS text notifications, and audio notifications via the phone</li></ul>  |
| Access from PC:                                    | iVMS-4200 application   |
| Mobile phones support:                             | ✓   |
| Power supply:                                      | 5 V DC / 2 A (power adapter included)   |
| Main features:                                     | <ul style="list-style-type: none"><li>• Support for bidirectional communication of alarm events and other signals via the LAN, Wi-Fi, GPRS, 3G/4G networks using the main and backup channels</li><li>• Support for video events via a mobile client and email</li><li>• Configuration via the www client, mobile client or software</li><li>• Compliance with the SIA-Contact ID protocol</li><li>• Speaker built-in</li><li>• Emergency Power Supply : built-in battery Li-Ion 3.8 V / 4520 mAh - 17.176 Wh</li></ul> |
| Housing:   | Plastic   |
| Color:   | White   |
| Operation temp:                                    | -10 °C ... 55 °C  |

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

|                       |                   |
|-----------------------|-------------------|
| Dimensions:           | 155 x 155 x 35 mm |
| Manufacturer / Brand: | Hikvision         |
| SAP Code:             | 302401105         |
| Guarantee:            | <b>3 years</b>    |

## PRESENTATION

Top view:




Bottom view:



Connectors:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
 POL; 60-713 Poznań; Graniczna 10  
 e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

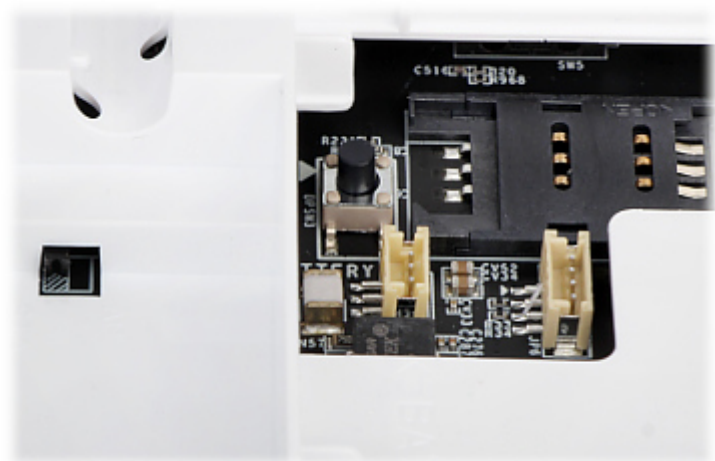

In the kit:



## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|