

Code: DSC-HS2LCDPE3

## WIRED KEYBOARD WITH RFID **DSC-HS2LCDPE3**

Net: 531.00 PLN Gross: 531.00 PLN



The DSC-HS2LCDPE3 keypad is intended for daily operations and programming the DSC series alarm control system. With the LCD display showing text messages, even advanced functionalities of the alarm control unit are simple and convenient. The built-in proximity card reader allows to operate the system without the necessity to remember passwords.

### SPECIFICATION

Support:	DSC alarm control panels of the series: PowerSeries NEO
Main features:	<ul style="list-style-type: none"><li>• RFID proximity reader built-in,</li><li>• 5 programmable function buttons to control the system,</li><li>• Keypad backlight buttons,</li><li>• Zones names displaying - facilitation of multi-zone control,</li><li>• Buzzer for acoustic signaling of some system events,</li><li>• Tamper detection - opening the enclosure, removing from mounting surface,</li><li>• Programmable input/output,</li><li>• Connection to the control panel via Corbus bus,</li><li>• Built-in temperature sensor - The alarm is triggered when the room temperature drops below 6°C,</li><li>• The keyboard line can be configured as DEOL,</li><li>• "Index of Protection" : IP30</li></ul>
Protection class (Grade):	2
Power supply:	13.8 V DC
Current consumption:	105 mA (max)
Operation temp:	-10 °C ... 55 °C
Weight:	0.25 kg
Dimensions:	168 x 122 x 20 mm
Manufacturer / Brand:	DSC
Guarantee:	2 years


### PRESENTATION

Front panel:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60



Mounting side view:

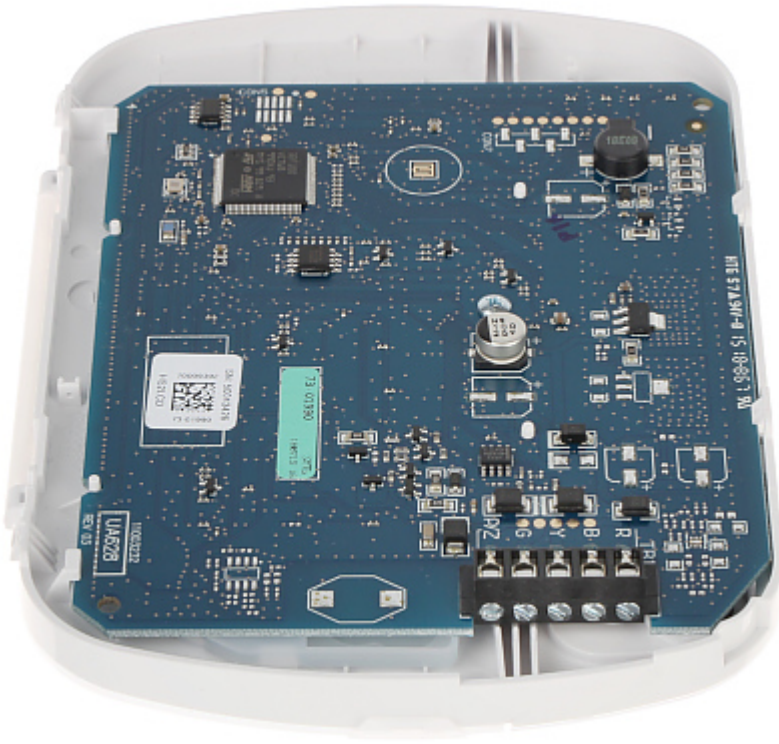

Connectors:



In the kit:



**PACKAGE**

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

