

Code: GBS-210

ACOUSTIC GLASS BREAK DETECTOR **GBS-210** JABLOTRON

Price visible after login



Sensor signals an alarm on registering a low-frequency tone (impact sound), followed by a high-frequency tone (sound of broken glass). The sensor starts to analyze a high-frequency channel after receiving the low-frequency sound wave, caused by the impact.

SPECIFICATION


Detection:	Glass break detector
Range:	max. 9 m
Environment class:	II
Sensitivity adjustment:	✓
Alarm signaling:	LED indicator, Relay output (NC)
Relay contacts rating (resistive load):	60 V / 50 mA
Power supply:	12 V DC
Main features:	<ul style="list-style-type: none">• detection of breaking plate, laminated or tempered glass• advanced dual-path microprocessor signal analysis• Tamper signaling - Relay output NC
Color:	White
Operation temp:	-10 °C ... 40 °C
Weight:	0.045 kg
Dimensions:	40 x 100 x 22 mm
Manufacturer / Brand:	JABLOTRON
Guarantee:	2 years

PRESENTATION

Internal view of the housing:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

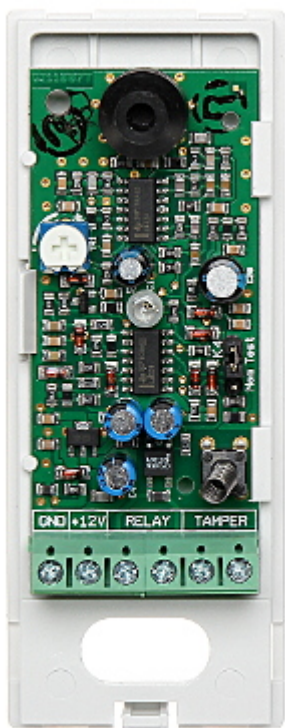

Mounting side view:



Detector range:

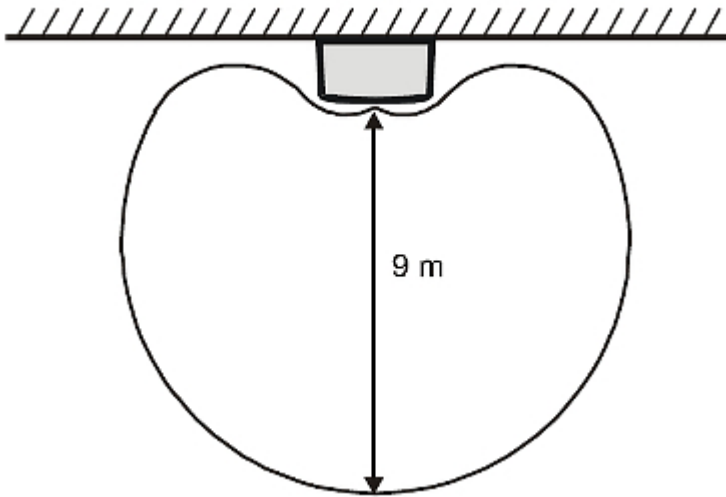

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

