

Code: DSC-LC-105-DGB

ACOUSTIC GLASS BREAK DETECTOR **DSC-LC-105-DGB**

Net: **85.00 PLN** Gross: **85.00 PLN**

Sensor signals an alarm on registering a low-frequency tone (impact sound), followed by a high-frequency tone (sound of broken glass). The sensor starts to analyze a high-frequency channel after receiving the low-frequency sound wave, caused by the impact. If during this time the high-frequency tone (sound of broken glass) is detected, the detector will trigger an alarm.

The DSC-LC-105-DGB detector, in addition to improved detection of glass breakage, also detects glass cutting with diamonds. The device does not have to be attached to the window to provide effective supervision, and at the same time allows to protect several windows with one detector.



SPECIFICATION

Detection:	Glass break detector
Range:	max. 10 m
Environment class:	II
Sensitivity adjustment:	✓
Alarm signaling:	LED indicators displaying the device's operating status, Signal to control panel
Relay contacts rating (resistive load):	50 mA / 24 V DC
Power supply:	9 ... 16 V DC / 40 mA (max)
Main features:	<ul style="list-style-type: none">• Detecting the breakage or cutting of glass• advanced dual-path microprocessor signal analysis• trimmer sensitivity adjustment• TAMPER switch indicating open the cover
Color:	White
Operation temp:	-30 °C ... 70 °C
Weight:	0.04 kg
Dimensions:	48 x 79 x 21 mm
Manufacturer / Brand:	DSC
Guarantee:	2 years


PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Internal view:

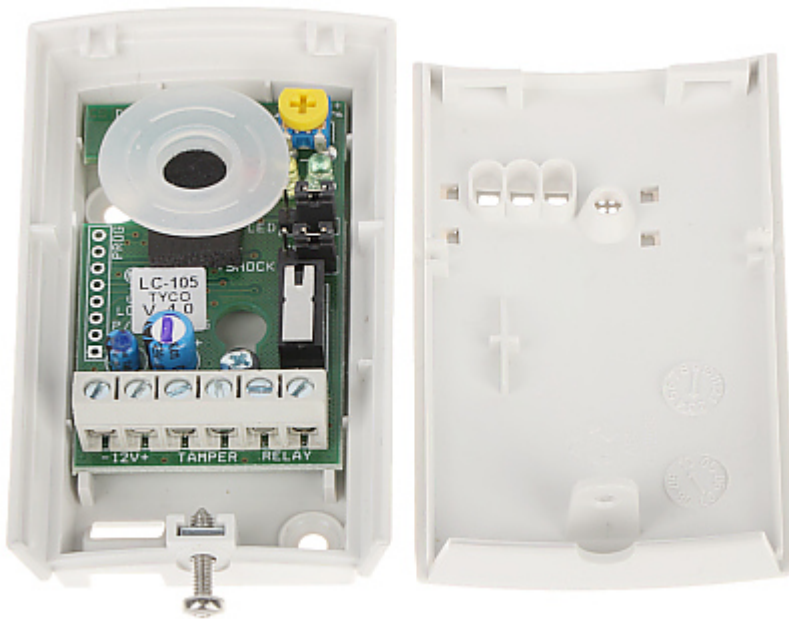



Mounting side view:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------