

# GRAPHIC KEYPAD FOR ALARM CONTROL PANEL **INT-TSI-WSW/IT** SATEL

Net: **1 026.44 EUR** Gross: **1 026.44 EUR**

The INT-TSI-WSW/IT sensoric keypad does not only stand for attractive design, but also for simplification for the daily operation of advanced alarm systems and home automation using the functionalities of the INTEGRA control units.

With the MAKRO functions, a whole sequence of actions can be performed through a single command.



## SPECIFICATION

|                       |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-----------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Support:              | INTEGRA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Main features:        | <ul style="list-style-type: none"> <li>• Large, easily readable LCD with backlight displaying detailed information on system state</li> <li>• 2 Inputs</li> <li>• 7 " capacitive touch screen</li> <li>• MAKRO features that activates sequence of actions with a single key</li> <li>• easy operation of the multi-zone systems</li> <li>• Alarms: keypad hold-down PANIC, FIRE and AUX</li> <li>• Buzzer for acoustic signaling of some system events</li> <li>• Panel communication loss indication</li> <li>• Microswitch as tamper contact</li> <li>• Possibility to display the images from cameras connected to the Internet (JPEG and MJPEG)</li> <li>• The microSD cards support - among others to record the events from alarm control panel - 2 GB included</li> <li>• Ability to display the images from Internet cameras (MJPEG / H.264)</li> </ul> |
| Power supply:         | 12 V DC                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Current consumption:  | max. 620 mA                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      |
| Color:                | White                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Operation temp:       | -10 °C ... 55 °C                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                 |
| Weight:               | 0.42 kg                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |
| Dimensions:           | 196 x 128 x 22 mm                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                |
| Manufacturer / Brand: | SATEL                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| Guarantee:            | 2 years                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          |


## PRESENTATION



Mounting side view:



View after remove the cover:

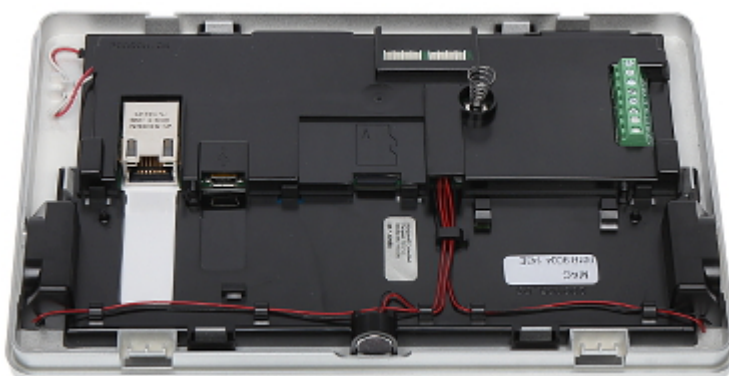

In the kit:



## OUR OPINIONS



- Possibility to display the images from cameras connected to the LAN( IP Gemini-61x and IP Gemini-62x).

## PACKAGE

|                                  |                    |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60