

Code: AWS-1244

ANTENNA AMPLIFIER **AWS-1244** AMS

Net: **33.11 EUR** Gross: **33.11 EUR**

The AWS-1244 is used to TV signal distribution in home antennas installations.

The amplifier allows to power additional amplifiers via the INPUT (power supply activated by a jumper). The maximum current that can be consumed by an additional amplifier is 100 mA.

The amplifier also has a gain controller that allows to set the optimal signal level in the antenna installation. Amplifier can be powered directly from included power adapter or via output with using a separator.



SPECIFICATION


Frequency range:	87 MHz ... 790 MHz
Number of inputs/outputs:	1 / 4
Input/output impedance:	75 Ω
Connectors type:	"F"
Gain :	21 / 25 dB $\pm$ 2 dB
Gain adjustment:	0 ... 10 dB $\pm$ 2 dB
S/N ratio:	$\leq$ 4 dB
Maximum output level:	101 dB μ V (2kTV)
IMA3 60dB:	95 dB μ V
IMA2 60dB:	82 dB μ V
Return loss:	$\geq$ 10 dB
Pre-amplifiers powering:	✓
Main features:	Built-in pass-through filter 87 ... 790 MHz
Operation temp:	-25 $^{\circ}$ C ... 55 $^{\circ}$ C
Power supply:	12 V DC / 250 mA (power adapter included)
Weight:	0.3 kg
Dimensions:	125 x 88 x 26 mm
Manufacturer / Brand:	AMS
Guarantee:	3 years

PRESENTATION


Connectors:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

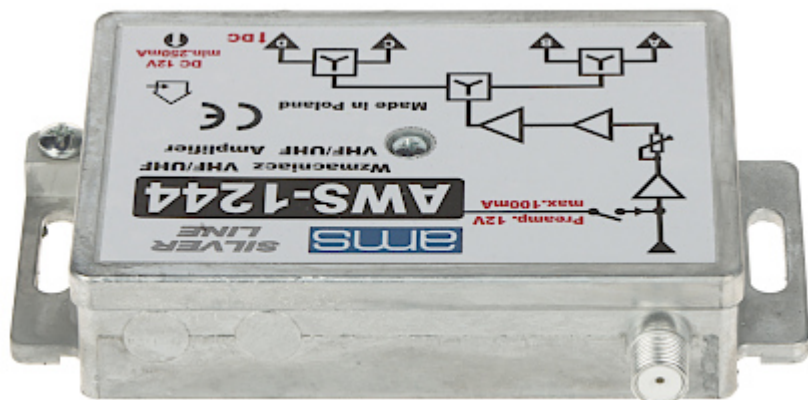

Top view:

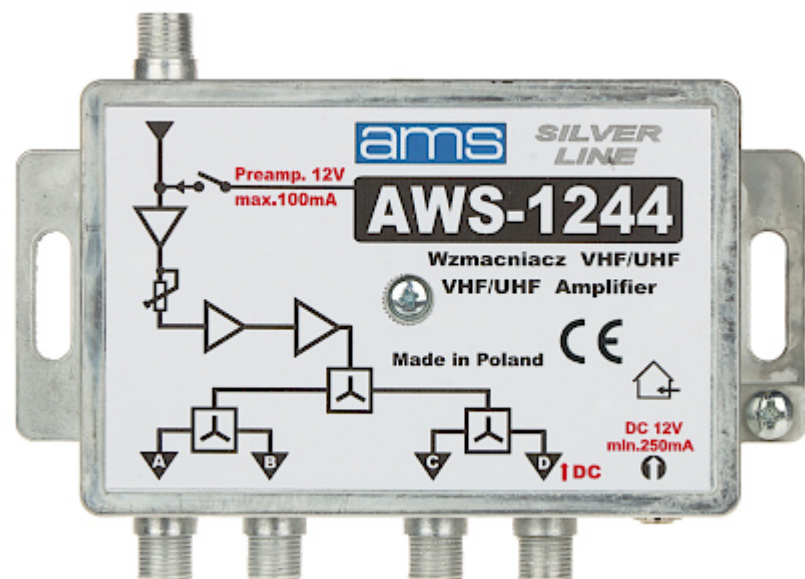

Internal view of the housing:

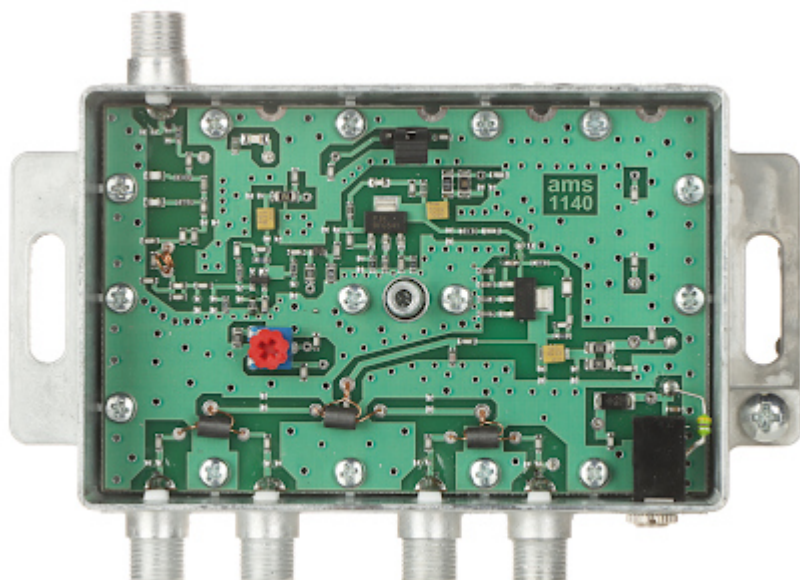

In the kit:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------