

Code: CA139-VDE

## POWER SUPPLY ADAPTER CA139-VDE

Net: 100.80 PLN Gross: 100.80 PLN

The CA139-VDE power supply allows to supply 4 device sections. The maximum load for each section is 12V<sub>DC</sub> / 700mA.

Attention! If the power adaptor is using for continuous work (24H) the rated current of the adaptor should be less than 80% of the maximal current.

Please pay attention for proper cooling conditions of the power adaptor during work!

The Power Supply Unit complies with the ecodesign requirements (ErP 2009/125/EC Directive and its implementing Regulation No. 278/2009 regarding external power supplies). The device meets, among others, the requirements of the average active efficiency and power consumption at no-load condition.



### SPECIFICATION

Adapter type:	Switching
Power voltage:	230 V AC
Voltage frequency range:	50 / 60 Hz
Output voltage:	12 V DC
Output voltage adjustment:	—
Maximal load:	4 x 0.7 A / 2.8 A (total)
Output power:	34 W
Protections:	Overload
Number of outputs:	4 pcs
Power connectors type:	<ul style="list-style-type: none"><li>• 230 V CEE 7/16</li><li>• 12 V - 2.1/5.5 mm Straight plug</li></ul>
Housing type:	Desktop
Weight:	0.30 kg
Dimensions:	150 x 70 x 31 mm
Guarantee:	2 years

### PRESENTATION


Mounting side view:



Connectors:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60



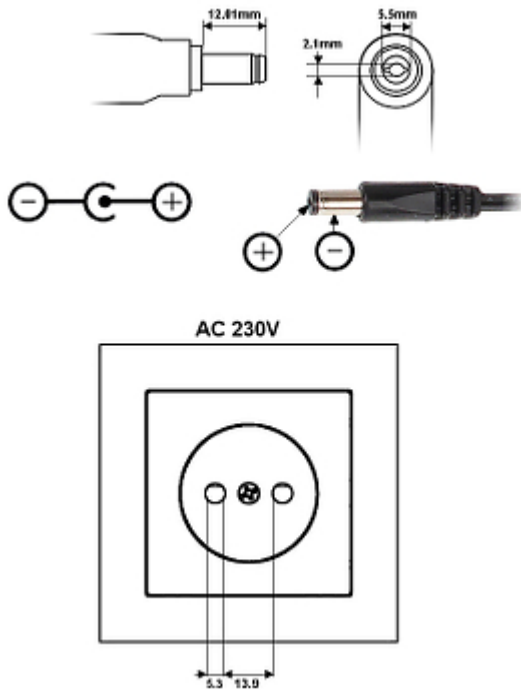

**PACKAGE**

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

