


Code: HPSDC-12V16X1A

SWITCHING ADAPTER **HPSDC-12V16X1A** PULSAR

Net: **339.00 PLN** Gross: **339.00 PLN**

Power adapter is equipped with aesthetic, solidly made metal casing box. Power adapter output voltage is DC 12V. It allows to connect up to 16 devices. Maximal load for the one output is 1A, but you should remember the total load for all outputs must be lower than 15A. Each output is protected independently with glass fuse.

Please pay attention for proper cooling conditions of the power adaptor during work!

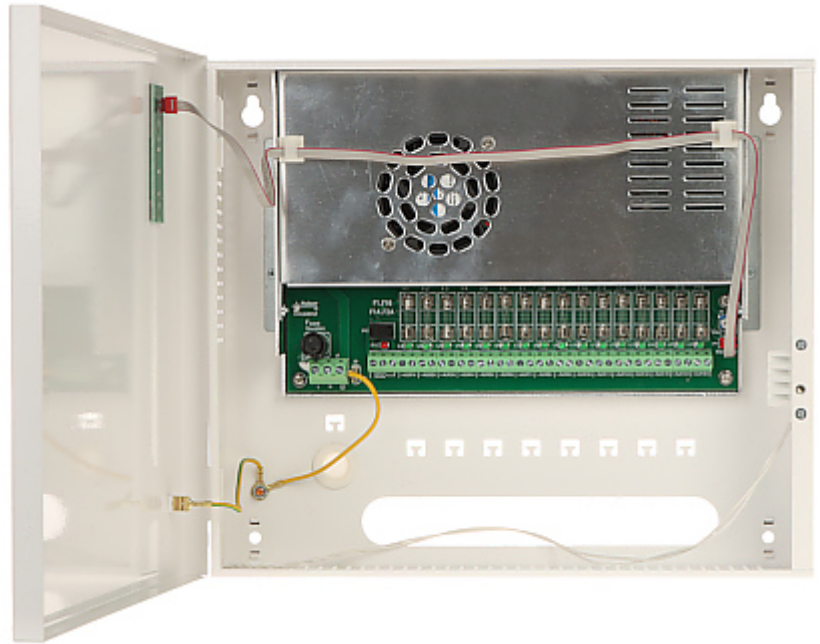

SPECIFICATION

Adapter type:	Switching
Output voltage:	12 V DC
Output voltage adjustment:	12 V ... 15 V - By potentiometer
Max. output current (total):	15 A
Max. output current for single output:	1 A
Outputs protection:	1 A Glass Fuse
LED indication:	✓
Protection:	<ul style="list-style-type: none">• Short-circuit• Overload• Overvoltage• Overvoltage
Input voltage:	200 ... 240 V, 50 / 60 Hz
Power:	180 W (max)
Number of outputs:	16
Connector type:	Cable terminals
Main features:	<ul style="list-style-type: none">• Efficiency : 85 %• LED indication• FPS output - indicating power supply unit operation state: normal or failure• Tamper detection - opening the enclosure• Protection class EN 62368-1 : I• "Index of Protection" : IP20
Housing type:	Metal, wall-mounted
Key closed:	—
Operation temp. / Relative humidity:	-10 °C ... 40 °C / 20 ... 90 %

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Weight:	2.64 kg
Dimensions:	305 x 262 x 85 mm
Manufacturer / Brand:	PULSAR
Guarantee:	2 years

PRESENTATION

Power adaptor with closed cover:



Internal view of the housing:

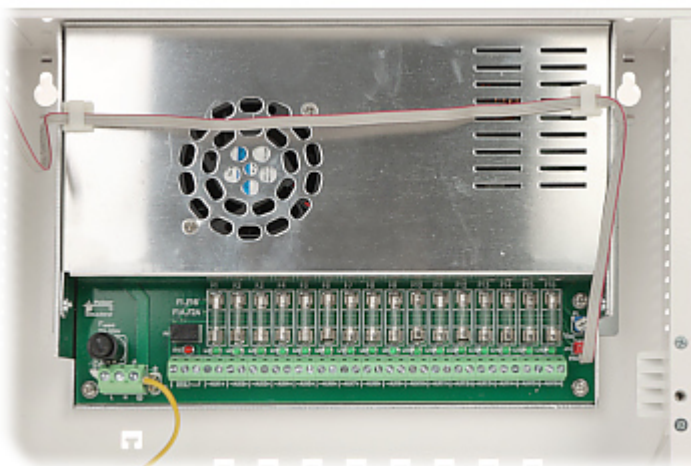

Mounting side view:





PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

