

Code: 12V/1.71A/COTEK

## SWITCHING ADAPTER 12V/1.71A/COTEK

Net: 81.82 PLN Gross: 81.82 PLN

Switching adapter installed on the TS35/7.5 or 15 DIN rail, resistant to high operation temperatures (up to 70°C).



### SPECIFICATION

Adapter type:	Switching
Power voltage:	88 ... 264 V AC
Output voltage:	12 V DC
Output voltage adjustment:	10.8 ... 13.2 V
Voltage tolerance:	± 1 %
Maximal load:	1.71 A
Output power:	20.4 W
Number of outputs:	1 pcs
Efficiency:	83 %
Housing type:	DIN
MTBF (Mean Time Between Faults):	120400 hours
Vibration resistance:	10 ... 500 Hz max. 2 G for 60 minutes
Protections:	<ul style="list-style-type: none"><li>• Short-circuit</li><li>• Overvoltage</li><li>• Overload protection</li></ul>
Operation temp. / Relative humidity:	-20 °C ... 70 °C / 20 ... 90 %
Weight:	0.14 kg
Dimensions:	99 x 90 x 23 mm

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Guarantee:

2 years

## PRESENTATION


Front panel:



Rear panel (DIN rail installation):



Dimensions:

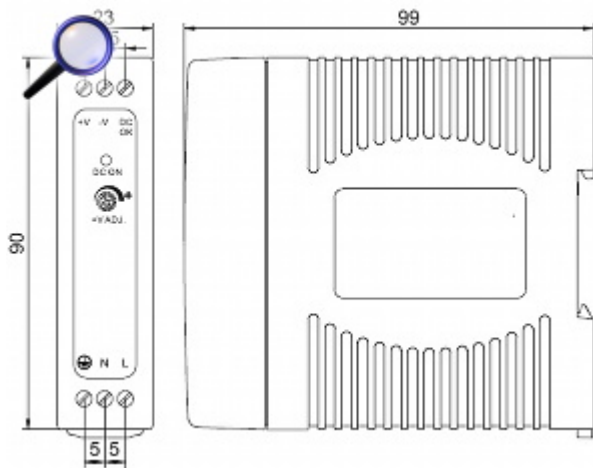

## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------