


Code: AWZ-508

RELAY MODULE AWZ-508

Net: 6.47 EUR Gross: 6.47 EUR

It can be used to increase maximal load of controller transistor output line and for galvanic isolation between output line and load point.

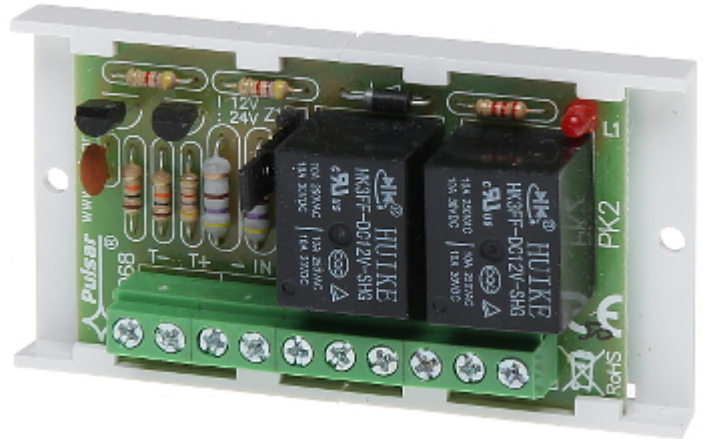


SPECIFICATION

Number of relay outputs:	2
Power supply:	<ul style="list-style-type: none">• 10 ... 15 V DC,• 21 ... 28 V DC (set by jumpers)
Current consumption:	75 mA (max)
Relay maximal load:	2 A (max), 30 V DC / 50 V AC (max)
Output:	2 x NO/NC
Main features:	<ul style="list-style-type: none">• relay inputs triggering by low or high voltage - T+ / T- input• LED indication
Operation temp:	-10 °C ... 40 °C
Weight:	0.04 kg
Dimensions:	79 x 43 x 23 mm
Manufacturer / Brand:	PULSAR
Guarantee:	2 years


PRESENTATION

Top view:

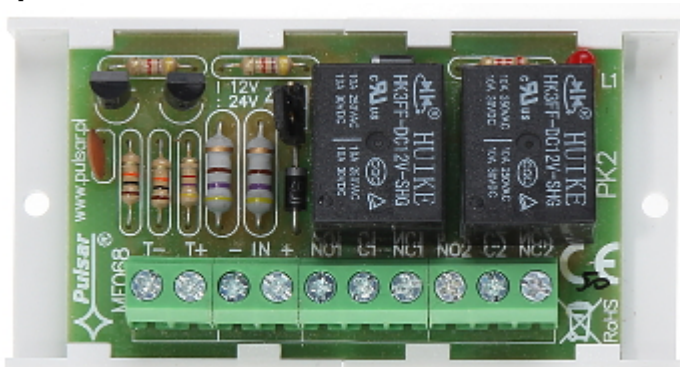

Connectors:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

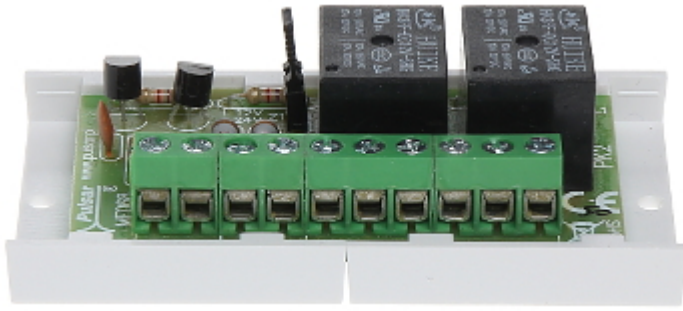

Mounting side view:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

