

Code: LZ-6/POL-G

POWER SUPPLY DISTRIBUTOR LZ-6/POL-G

Net: 43.80 PLN Gross: 43.80 PLN

The LZ-6/POL-G is a passive device and allows to distribute the power supply.

The housing of the LZ-6/POL-G has been prepared for mounting with screws to a wall or with a tie to a mast (tie, screws - not included).

An unquestionable advantage of employing the LZ-6/POL-G in monitoring systems powered from a central point is additional tamper protection. Without individual protection for each power line, an intruder can stop powering of the whole system just by shorting out the power line of the single camera.




SPECIFICATION

| | |
|--|--|
| Number of power inputs: | 2 |
| Number of power outputs: | 6 |
| Maximal power voltage: | 24 V DC (typical 12V) |
| Maximal power supply current: | terminals • 9 A terminals • 4 A 5.5/2.1 socket |
| Max. output current for single output: | 1.5 A |
| Protection type: | 6 x 1.5 A Polymer fuse |
| Power connectors type: | Input : socket 2.1/5.5 mm / Cable terminals Output : sockets 2.1/5.5 mm |
| Operation temp: | -50 °C ... 55 °C |
| Permissible relative humidity: | < 95 % |
| Weight: | 0.09 kg |
| Dimensions: | 120 x 91 x 37 mm |
| Manufacturer / Brand: | DELTA |
| Guarantee: | 3 years |

PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

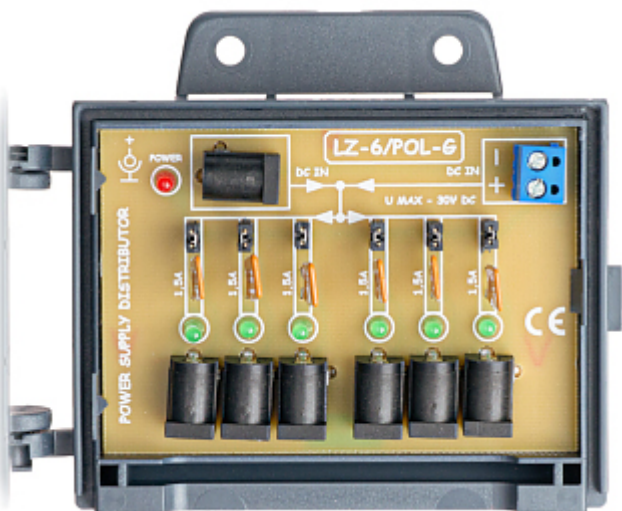

Power distributor after connecting all outputs and input:



The housing construction enables easy mounting the device on a wall or mast, using tie for example:



OUR OPINIONS



- We don't recommend to use the angular plugs with this power distributor.

PACKAGE

| | |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|

