

Code: AWZ-574


POWER SUPPLY DISTRIBUTOR **AWZ-574**

Net: **6.79 EUR** Gross: **6.79 EUR**

The AWZ-574 is a passive device and allows to distribute the power supply. An unquestionable advantage of employing the AWZ-574 in monitoring systems powered from a central point is additional tamper protection.

The housing of the AWZ-574 has been prepared for mounting with screws to a wall or with a tie to a mast (tie, screws - not included).

For more devices than 4, the devices can be connected in parallel on the same terminal.

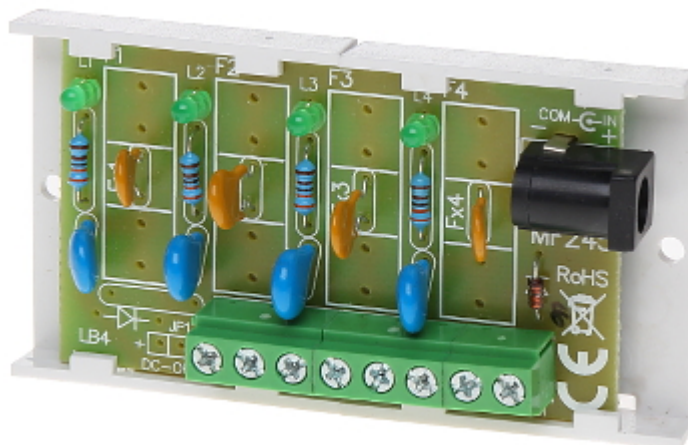


SPECIFICATION


Number of power inputs:	2
Number of power outputs:	4
Maximal power voltage:	30 V DC (typical 12V)
Maximal power supply current:	2 A
Max. output current for single output:	0.5 A
Protection type:	4 x 0.5 A - PTC Polymer Fuse
Power connectors type:	Input - 5.5/2.1 socket, Cable terminals Output - Cable terminals
Operation temp:	-10 °C ... 50 °C
Main features:	• Protections : Short-circuit, Overvoltage, Overload • LED indicator
Housing type:	Plastic
Dimensions:	80 x 43 x 18 mm
Weight:	0.03 kg
Manufacturer / Brand:	PULSAR
Guarantee:	2 years

PRESENTATION

Top view:

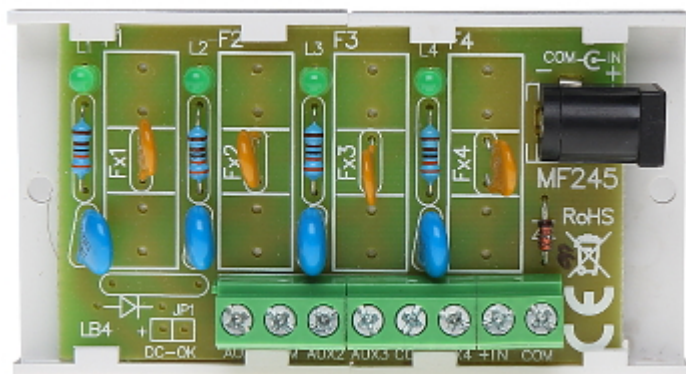

Side view:

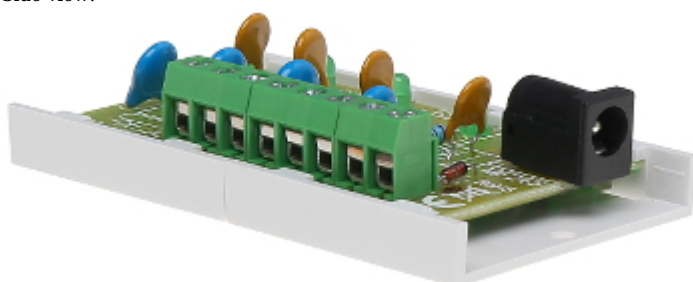

Mounting side view:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60