

Code: APTI-25V3-2812

IP VANDALPROOF CAMERA **APTI-25V3-2812** - 1080p 2.8 ... 12 mm

Net: **96.23 EUR** Gross: **96.23 EUR**

IP camera with efficient H.264 image compression algorithm for clear and smooth video streaming at maximal resolution of 1080p (2.4 MPx). Very easy operation by Internet Explorer browser allows the users to convenient and remote support, and also remote management of the camera. Included camera software enables management and integrated monitoring of many network cameras. Its using allows to create large surveillance system.

ICR - The movable IR filter allows to perfect colors reproduction in daylight and wide gray-scale with high sharpness of the image at night mode.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.8 " Sony CMOS IMX322
Digital Image Processor:	DSP AMBARELLA A5S66
Matrix size:	2.4 Mpx
Resolution:	1920x1080 - 1080p , 1280x720 - 720p
Lens:	2.8 ... 12 mm, 3 Mpx
View angle:	85 ° ... 24 ° (manufacturer data) 93 ° ... 36 ° (our tests result)
S/N ratio:	> 50 dB
Range of IR illumination:	30 m
RS-485 interface:	—
Memory card slot:	—
Compression:	H.264
Alarm inputs / outputs:	—
Audio:	—
Bitrate:	64 ... 12000 kbps
Main stream frame rate:	max. 25 fps - 1080p
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	RTSP, FTP, PPPOE, DHCP, DDNS, NTP, UPnP, TCP
WEB Server:	Built-in - port 80
Max. number of on-line users:	3
ONVIF:	2.4 - port 8999

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Mobile phones support:	Android, iOS (iPhone, iPad) - mobile port 6666
Main features:	• ICR - Movable InfraRed filter • 3D-DNR - Digital Noise Reduction • WDR - Wide Dynamic Range • Possibility to change the resolution, quality and bit rate • Motion Detection • Privacy zones • Configurable: brightness, contrast, saturation • Sharpness - sharper image outlines • Mirror - Mirror image
Power supply:	12 V DC / 440 mA
Housing:	Metal
Color:	Graphite
Vandal-proof:	✓
Operation temp:	-20 °C ... 55 °C
"Index of Protection":	IP66
Weight:	0.63 kg
Dimensions:	Ø 120 x 95 mm
Supported languages:	English, Polish
Guarantee:	2 years

PRESENTATION


Camera view after remove the Dome cover - camera lens adjustment knobs are visible:




Mounting side view:

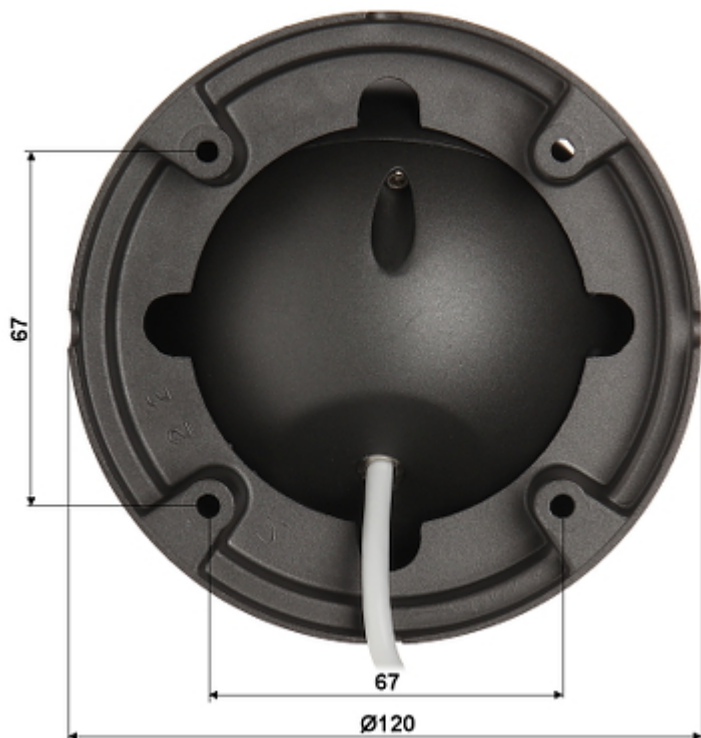

See how you can power the camera in PoE standard:

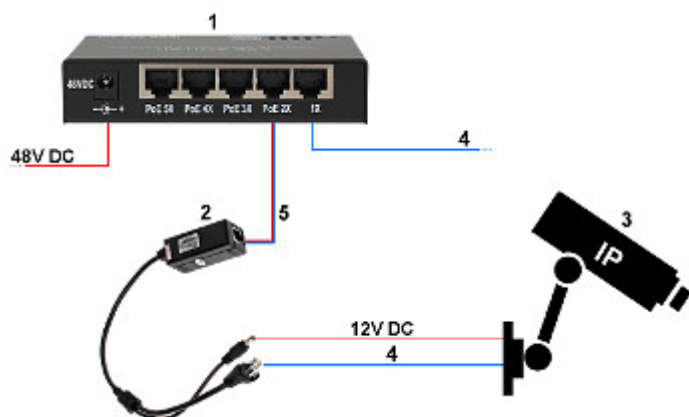

1. SWITCH PoE
 2. POE-802.3AF/C
 3. IP Camera
 4. Ethernet
 5. Ethernet + PoE
- In the kit:

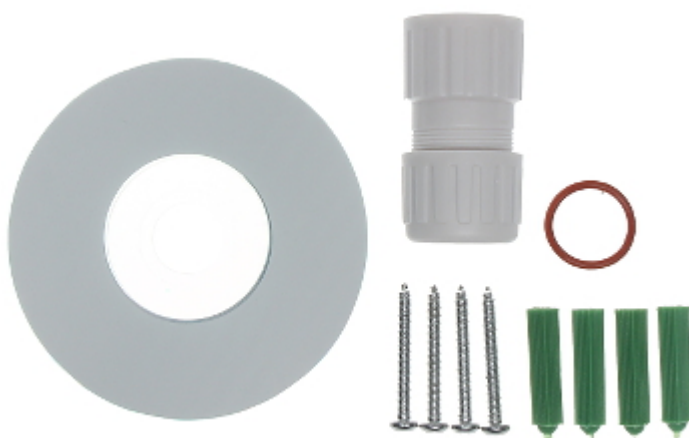

OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



Record from camera during daylight operation:

:

Record from camera during night conditions operation:

:

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------