

Code: POE-802.3AF/C

STABILIZER 48V/12V **POE-802.3AF/C**

Net: **9.29 EUR** Gross: **9.29 EUR**

The POE-802.3AF/C allows to supply the devices with DC 12V.

Attention! If the power adaptor is using for continuous work (24H) the rated current of the adaptor should be less than 80% of the maximal current. Please pay attention for proper cooling conditions of the power adaptor during work!

At load 1.2 A, the power supply circuit protection is activated. Lowering the current to 0.8 A restores normal operation.



SPECIFICATION

Standards:	PoE (802.3af), PoE (802.3at)
Input socket:	RJ-45
Number of inputs:	1 x RJ-45 socket - PoE
Number of outputs:	1 x RJ-45 plug 1 x 2.1/5.5 mm plug on the cable
Input voltage:	44 - 57 V PoE
Output voltage:	12 V DC +/- 10%
Output current:	• 0.8A / 12V DC (continuous operation) • max. 1A / 12V DC (instantaneous operation)
Supported data rates:	• Ethernet - 10 Mbps Half Duplex • Fast Ethernet - 100 Mbps Full Duplex
Maximal transmission range:	100 m (DATA)
LEDs application:	Power supply PoE - Yellow
Certificates:	CE
Weight:	0.05 kg
Dimensions:	82 x 29 x 24 mm
Guarantee:	2 years


PRESENTATION

Connectors:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



See how you can power the camera in PoE standard:

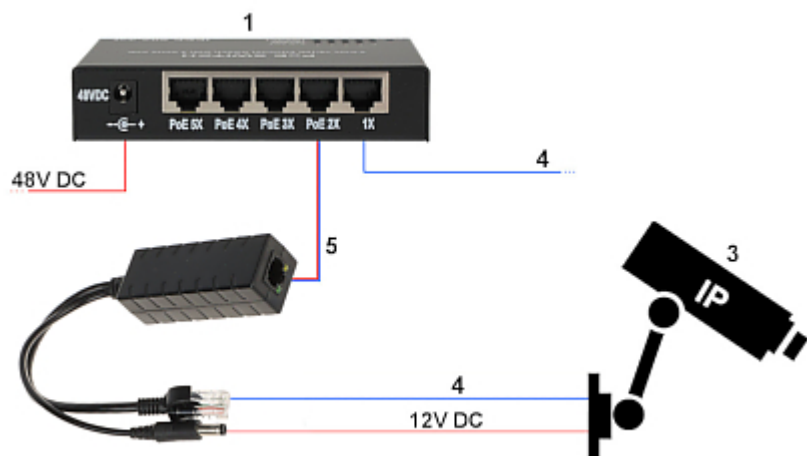

1. SWITCH PoE
2. STABILIZER POE-802.3AF/C 48V/12V
3. IP Camera
4. Ethernet
5. Ethernet + PoE

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

