

Code: EPRADO-R19-42U/800X800

STANDING RACK CABINET **EPRADO-R19-42U/800X800**

Net: **2 718.40 PLN** Gross: **2 718.40 PLN**



More and more home devices to LAN, RTV, CCTV installations are made with a view to the RACK system, so that their installation is aesthetically pleasing, and that devices are protected against accidental mechanical damages.

The EPRADO-R19-42U/800X800 cabinet is suitable for mounting all sorts of devices in standard 19" rack housings. Ideal solution for installing DVRs, power units, splitters, headends, network devices, etc. Inside the cabinet can be also place the devices that are not in standard RACK-19" housings, for example DVRs, multiswitches, RTV-SAT amplifiers, modulators. For this purpose the user should mount additional shelf/shelves available for RACK cabinet.

The RACK cabinet has many openings ensuring adequate air circulation. Additionally, it is possible to install fans to increase the ventilation.

Non-rack devices can be mounted on the four-point mounted shelves , with a depth of max. 660 mm.

The EPRADO-R19-42U/800X800 cabinet is intended for self-assembly.

SPECIFICATION

| | |
|------------------------|--|
| Internal width: | 19 " |
| Internal height: | 42 U |
| Internal depth: | 660 mm |
| External width: | 800 mm |
| External height: | 2072 mm |
| External depth: | 800 mm |
| Holes for fan coolers: | 105 x 105 mm (4 places) 335 x 260 mm (total size of the hole) |
| Bearing capacity: | 800 kg |
| Color: | Black RAL9004 |
| Door: | <ul style="list-style-type: none">• Front: glass• Side: metal, snap-in• Rear: metal, hinges |
| Main features: | <ul style="list-style-type: none">• Cable entries are placed from the top and bottom• Cable entry in the base with dimensions of 380 x 280 mm• Removable side panels• Possibility to mount the door as left or right• 4 keys included• Four rack rails for mounting devices (2x front, 2x rear)• The cabinet moves on the lockable castors, stabilizing by twisting 4 leveler legs |
| Weight: | 112 kg |
| Guarantee: | 3 years |

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

PRESENTATION

Front view:



Rear view:





The correct order of assembly:
Assemble two frames of the sides:



Whole frame connect to the base and cabinet cover:





Next add the inner support elements:








Side view (no mounted sides and back cover):




Front view:



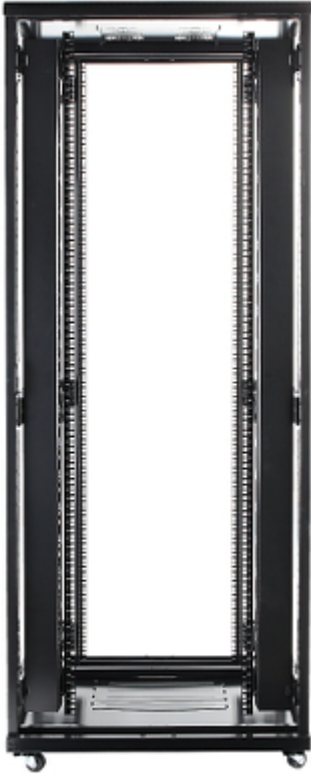

Rear view:

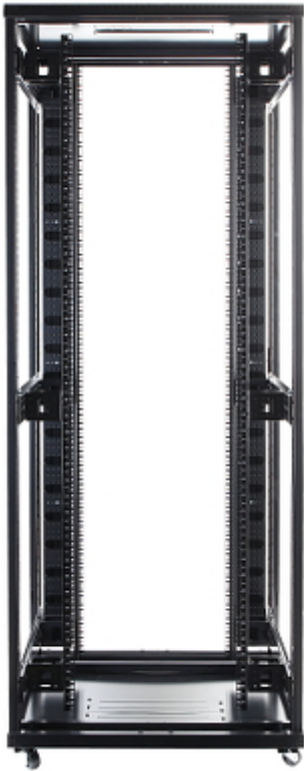

The cabinet has 2 opened cable trays which can be mounted to both the back and front:



Cable entry in the base with dimensions of 380 x 280 mm:





Holes for fan coolers:



Grounding:





In the kit:



PACKAGE

| | |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|