


Code: HPSB-12V10A-C

BUFFERED SWITCHING POWER SUPPLY ADAPTER **HPSB-12V10A-C** PULSAR

Net: **320.00 PLN** Gross: **320.00 PLN**

The buffered power supply adapter is designed to powering control panels, sensors, code locks, cameras, consoles, intercoms and other alarm system equipment.

Please pay attention for proper cooling conditions of the power adaptor during work!

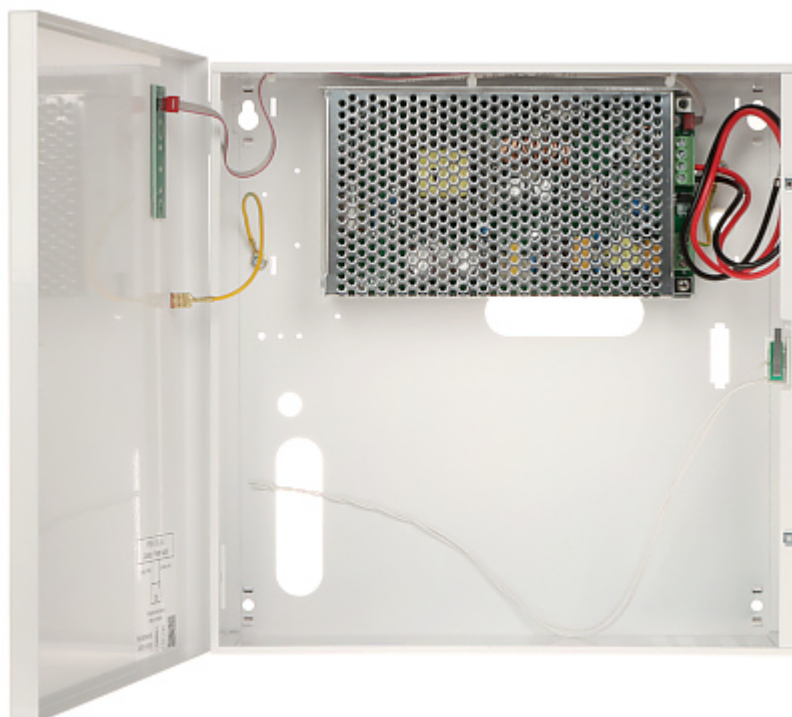

SPECIFICATION

Adapter type:	Switching
Input voltage:	200 V ... 240 V AC
Output voltage:	11.0 V ... 13.8 V (buffer operation)
Max. output current (total):	10 A
Battery charging current:	1 A / 4 A
Power:	138 W
Number of outputs:	1
Protections:	<ul style="list-style-type: none">• Short-circuit• Overload• Overvoltage• Tamper• Reverse polarity connection• Discharge
Adapter operation control:	<ul style="list-style-type: none">• AC input voltage presence indication AC• DC output voltage presence indication DC• Battery charging
Place for battery:	12V/17Ah
Max. battery dimensions:	250 x 172 x 100 mm
Weight:	2.52 kg
Dimensions:	305 x 305 x 113 mm

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Manufacturer / Brand:	PULSAR
Guarantee:	2 years

PRESENTATION


Front view:



Internal view of the housing:




Connectors:

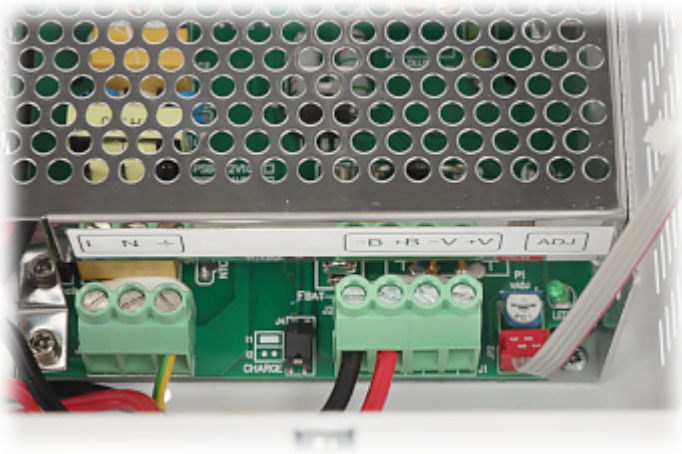

Mounting side view:



Dimensions:

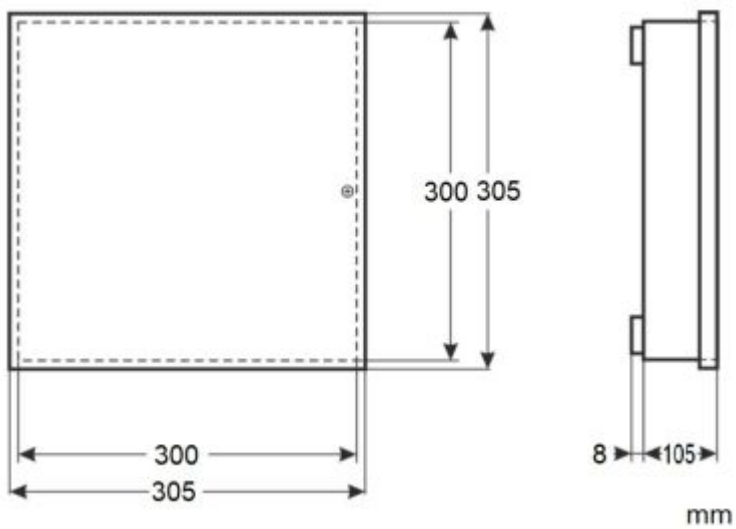

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60