


Code: PSBS-10A12C

BUFFERED SWITCHING POWER SUPPLY ADAPTER **PSBS-10A12C**

Net: **102.47 USD** Gross: **102.47 USD**

The buffered power supply adapter is designed to powering control panels, sensors, code locks, cameras, consoles, intercoms and other alarm system equipment.
Please pay attention for proper cooling conditions of the power adaptor during work!

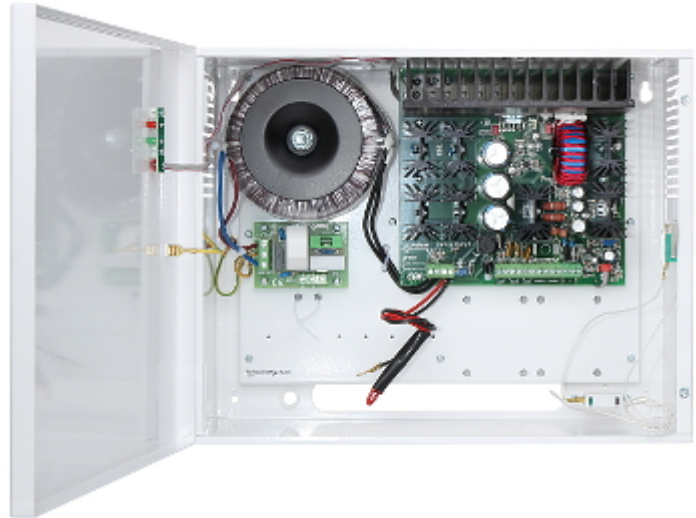


SPECIFICATION

| | |
|------------------------------|---|
| Adapter type: | Switching |
| Input voltage: | 230 V AC |
| Output voltage: | 11 V ... 13.8 V (buffer operation) |
| Max. output current (total): | 10 A |
| Battery charging current: | 0.7 A / 2.1 A / 3.6 A / 4.8 A |
| Power: | 138 W |
| Number of outputs: | 3 |
| Protections: | <ul style="list-style-type: none">• Short-circuit• Overload• Overvoltage• Overheat• Tamper• Reverse polarity connection• Discharge |
| Adapter operation control: | <ul style="list-style-type: none">• AC input voltage presence indication AC• DC output voltage presence indication DC• FPS output - indicating power supply unit operation state: normal or failure• FAC output - indicating AC power collapse |
| Place for battery: | 12V/17Ah |
| Max. battery dimensions: | 250 x 175 x 80 mm |
| Weight: | 9.08 kg |
| Dimensions: | 350 x 277 x 171 mm |
| Manufacturer / Brand: | PULSAR |
| Guarantee: | 2 years |

PRESENTATION

Internal view:

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

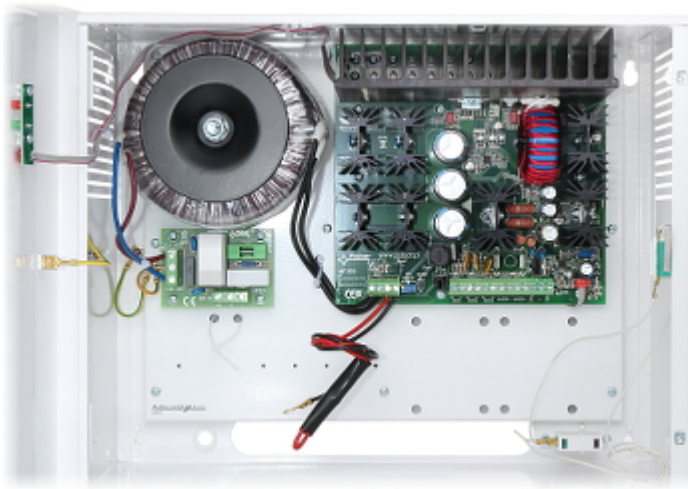


Front view:



Mounting side view:



Dimensions:

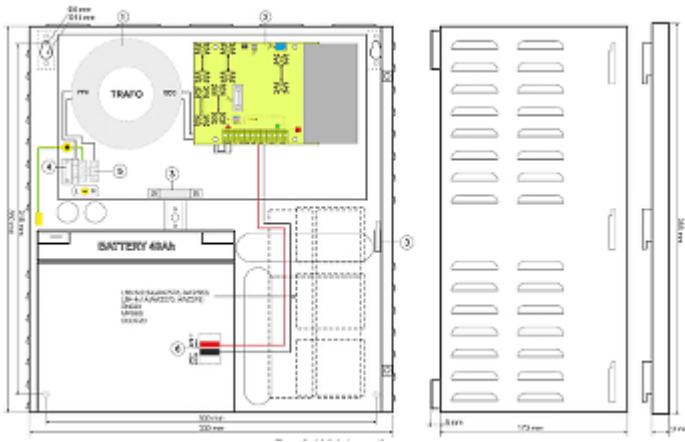

PACKAGE

| | |
|----------------------------------|--------------------|
| Dimensions (L x W x H): 0x0x0 mm | Gross Weight: 0 kg |
|----------------------------------|--------------------|

