

Code: PSBS-10A12D

BUFFERED SWITCHING POWER SUPPLY ADAPTER **PSBS-10A12D**

Net: **128.71 EUR** Gross: **128.71 EUR**



The buffered power supply adapter is designed for powering control panels, sensors, code locks, cameras, consoles, intercoms and other alarm system equipment. Please pay attention for proper cooling conditions of the power adaptor during work!


SPECIFICATION

Adapter type:	Switching
Input voltage:	230 V AC
Output voltage:	11 V ... 13.8 V (buffer operation)
Max. output current (total):	10 A
Battery charging current:	0.7 A / 2.1 A / 3.6 A / 4.8 A
Power:	138 W
Number of outputs:	4
Protections:	<ul style="list-style-type: none">• Short-circuit• Overload• Overvoltage• Overheat• Tamper• Reverse polarity connection• Discharge
Adapter operation control:	<ul style="list-style-type: none">• AC input voltage presence indication AC• DC output voltage presence indication DC• FPS output - indicating power supply unit operation state: normal or failure• FAC output - indicating AC power collapse
Place for battery:	12V/40Ah
Max. battery dimensions:	300 x 190 x 165 mm
Weight:	8.21 kg
Dimensions:	350 x 330 x 178 mm
Manufacturer / Brand:	PULSAR
Guarantee:	2 years

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

PRESENTATION

Internal view:

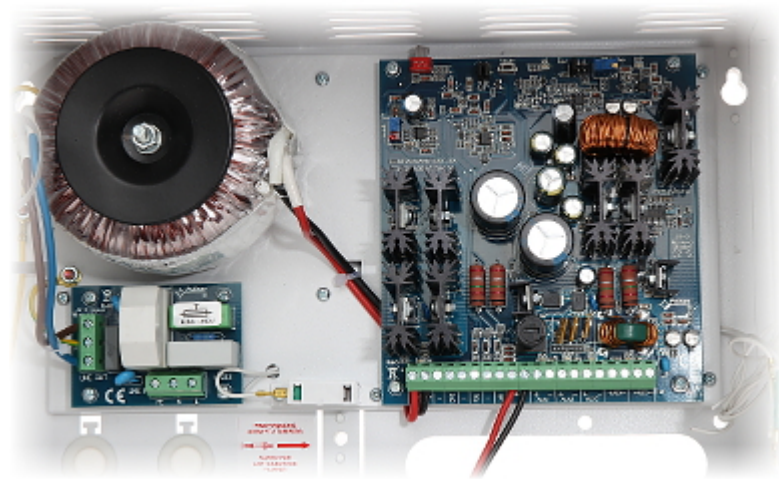

Front view:




Mounting side view:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



Dimensions:

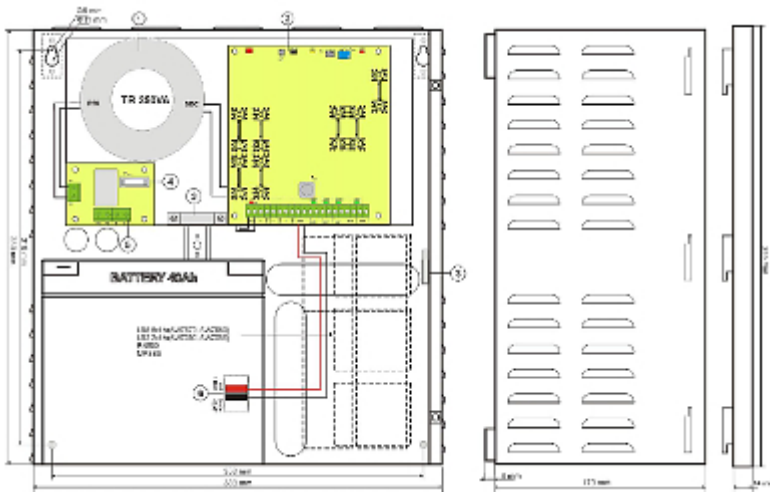

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------