

Code: SDR-480-24

SWITCHING ADAPTER **SDR-480-24** MEAN WELL

Net: 755.38 PLN Gross: 755.38 PLN

Switching adapter installed on the TS35/7.5 or 15 DIN rail, resistant to high operation temperatures (up to 70°C).

The power supply has been equipped with a relay that indicates the status of the DC output.

Attention! The -V terminals are physically shorted together, as are the +V terminals.



SPECIFICATION

Adapter type:	Switching
Power voltage:	• 90 ... 264 V AC • 127 ... 370 V DC
Output voltage:	24 V DC
Output voltage adjustment:	24 ... 28 V DC
Maximal load:	20 A
Output power:	480 W
Instantaneous maximum power:	720 W - 3 s (max)
Number of outputs:	1 pcs
Efficiency:	94 %
Housing type:	DIN
Relay output:	1 pcs - DC OK
Protections:	• Short-circuit • Overload • Overvoltage • Overheat
Operation temp. / Relative humidity:	-25 °C ... 70 °C / 20 ... 95 %
Weight:	1.59 kg
Dimensions:	139 x 125 x 86 mm

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Manufacturer / Brand:	MEAN WELL
Guarantee:	3 years

PRESENTATION



Adapter connectors:






Rear panel (DIN rail installation):



Dimensions:

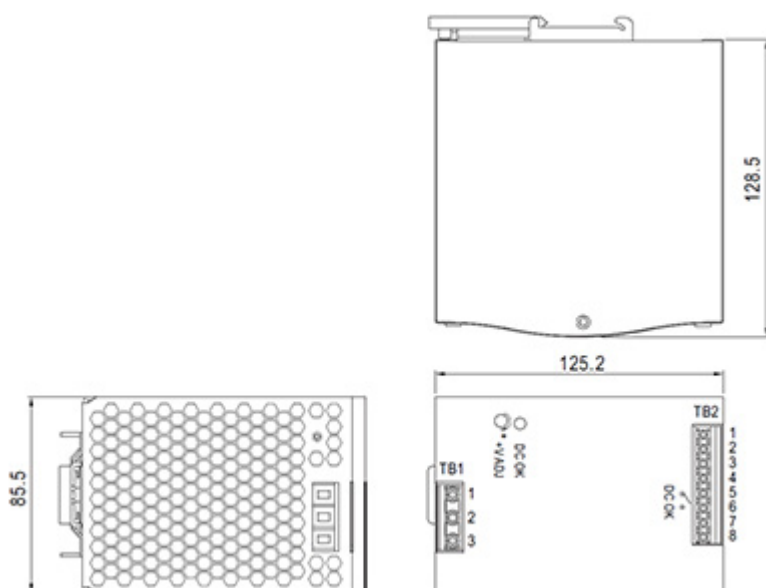

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

