

Code: DINB-27610

BUFFERED SWITCHING POWER SUPPLY ADAPTER **DINB-27610**

Net: **90.00 PLN** Gross: **90.00 PLN**

Buffered power adapter with DIN montage casing designed to systems supplied by 24V voltage. DINB-27610 is designed to mount on the DIN 35 mm rail.




SPECIFICATION

Adapter type:	Switching
Power voltage:	90 ... 264 V AC
Output voltage:	24 V DC
Output voltage adjustment:	<ul style="list-style-type: none">• 23 V ... 27.6 V DC (buffer operation)• 20 V ... 27.6 V DC (battery mode)
Maximal load:	1.2 A
Battery charging current:	0.2 A
Output power:	35 W
Protections:	<ul style="list-style-type: none">• Short-circuit• Overvoltage• Overload• Reverse polarity connection• Discharge
Number of outputs:	1 pcs
Adapter operation control:	<ul style="list-style-type: none">• AC input voltage presence indication• DC output voltage presence indication• Battery charging indication
Housing type:	DIN
Weight:	0.32 kg
Dimensions:	122 x 93 x 50 mm
Manufacturer / Brand:	PULSAR
Guarantee:	2 years

PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Adapter connectors:

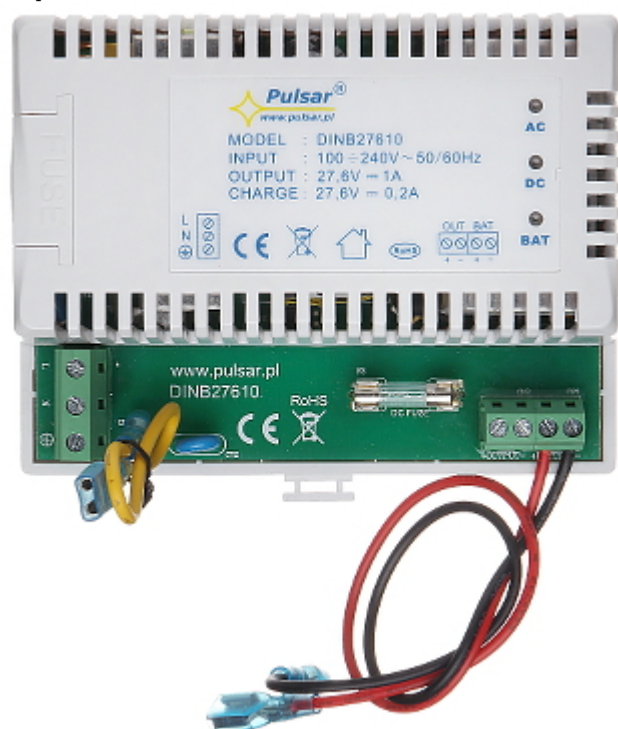

Mounting side view:



Dimensions:

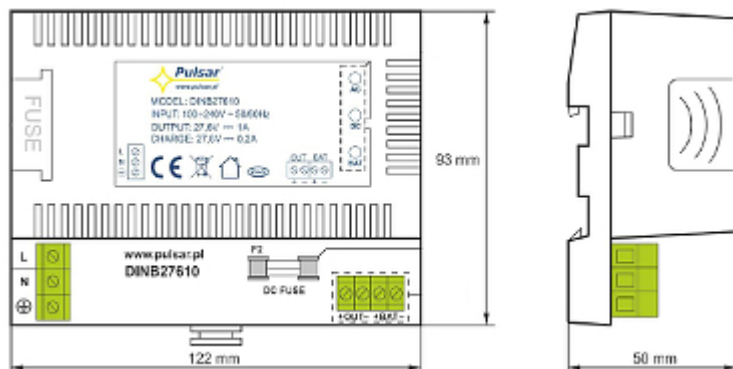

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

