

Code: GT-CI12V2-36W

IP CAMERA **GT-CI12V2-36W** - 720p 3.6 mm GEMINI TECHNOLOGY

Net: **57.98 EUR** Gross: **57.98 EUR**

IP camera with efficient H.264 image compression algorithm for clear and smooth video streaming at maximal resolution of 720p.

ICR - The movable IR filter allows to perfect colors reproduction in daylight and wide gray-scale with high sharpness of the image at night mode.



SPECIFICATION

Standard:	TCP/IP
Sensor:	1/2.7 " Sony CMOS
Matrix size:	1.0 Mpx
Scanning system:	Progressive
Resolution:	1280 x 720 - 720p 720 x 576 - D1 640 x 480 - VGA 640 x 360 - Q720p
Lens:	3.6 mm
View angle:	<ul style="list-style-type: none">• 83 ° (manufacturer data)• 90 ° (our tests result)
S/N ratio:	> 50 dB
Range of IR illumination:	30 m
Memory card slot:	—
Image compression method:	H.264, MJPEG
Alarm inputs / outputs:	—
Bitrate:	16 ... 8000 kbps
Main stream frame rate:	max. 25 fps - 720p
Network interface:	10/100 Base-T (RJ-45)
Network protocols:	TCP/IP, UDP, HTTP, DHCP, RTP/RTSP, DNS, DDNS, NTP, PPPOE, UPNP, SNMP, ONVIF
Audio:	—

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Max. number of on-line users:	10
RS-485 interface:	—
Mobile phones support:	Port 5800 • Android: Free application Fseye • iOS: Free application Fseye
Default admin user / password:	admin / (null)
Default IP address:	192.168.1.188
Web browser access ports:	80, 554, 1935
PC client access ports:	5050, 5051, 5052
WEB Server:	Built-in
Mobile client access ports:	5800
Max. number of on-line users:	10
Port ONVIF:	80
RTSP URL:	rtsp://ip_address:554/ch01.264 - Main stream rtsp://ip_address:554/ch01_sub.264 - Sub stream
Main features:	<ul style="list-style-type: none"> • Possibility to change the resolution, quality and bit rate • D-WDR - Wide Dynamic Range • 3D-DNR - Digital Noise Reduction • Motion Detection • Privacy zones - max. 4 • Mirror - Mirror image • Time mark and image description • Configurable: brightness, contrast, saturation • Sharpness - sharper image outlines • Day/Night mode - configurable • Possibility to add different privileges to the users
Vandal-proof:	—
Power supply:	12 V DC / 300 mA
Housing:	Dome - Metal
Color:	White
"Index of Protection":	IP65
Operation temp:	-10 °C ... 55 °C
Weight:	0.616 kg
Dimensions:	Ø 119 x 95 mm
Supported languages:	English, Polish
Manufacturer / Brand:	GEMINI TECHNOLOGY
Guarantee:	2 years

PRESENTATION


Camera is out from clamping ring:



Mounting side view:

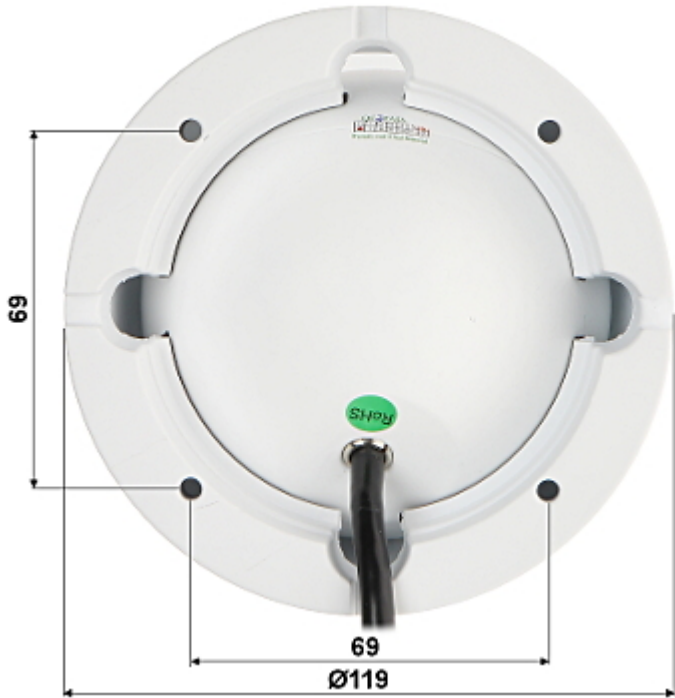

See how you can power the camera in PoE standard:

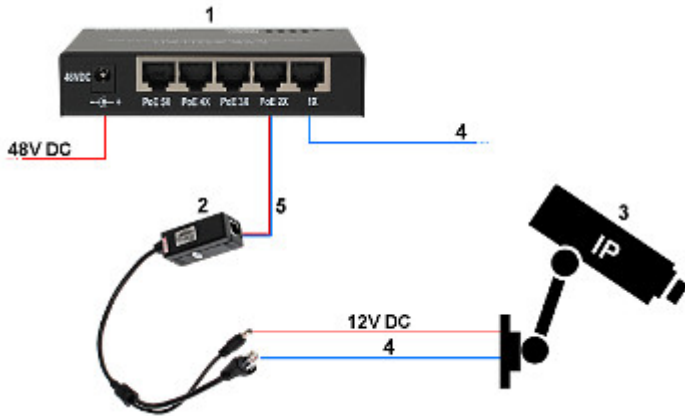

- 1. SWITCH PoE
- 2. POE-802.3AF/C
- 3. IP Camera
- 4. Ethernet
- 5. Ethernet + PoE

In the kit:



Package:



OUR TESTS

Camera image at artificial illumination (about 30Lux):



Camera image at night conditions with internal built-in IR illuminator on:



Camera image at direct strong light opposite to camera:



OUR OPINIONS



- Very well working motion detection with GT-Nxx-xxx DVR models cooperation.

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

