

Code: TC-C35XS SPEC:I3/E/Y/M/S/H/2.8MM/V4.0

# IP CAMERA **TC-C35XS SPEC:I3/E/Y/M/S/H/2.8MM/V4.0** - 5 Mpx 2.8 mm TIANDY

Net: **994.00 PLN** Gross: **994.00 PLN**

PoE powering possibility, compatible with the 802.3af standard makes the device more universal and easier to install. The range of IR illumination according to the manufacturer data, depends on outer conditions (visibility - air transparency, environment, wall colors ie. scene reflectance).



## SPECIFICATION

Standard:	IP
Resolution:	2880 x 1620 - 5 Mpx , 2688 x 1520 - 4 Mpx , 2560 x 1440 - 3.7 Mpx , 2304 x 1296 - 3 Mpx , 1920 x 1080 - 1080p , 1280 x 720 - 720p
Sensor:	1/2.7 " Progressive Scan CMOS
Lens:	2.8 mm
View angle:	104 °
Range of IR illumination:	30 m
Memory card slot:	Micro SD card support up to 512GB
Image compression method:	S+265 / H.265 / H.264
Alarm inputs / outputs:	1 / 1
Audio:	<ul style="list-style-type: none"><li>• Microphone built-in,</li><li>• Audio input</li><li>• Audio output</li><li>• Bi-directional audio streaming support</li><li>• Audio detection</li><li>• Compliance with the AAC standard</li></ul>
Main stream frame rate:	<ul style="list-style-type: none"><li>• 25 fps @ 5 Mpx</li><li>• 50 fps @ 2 Mpx</li></ul>

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Network interface:	10/100 Base-TX (RJ-45)
WEB Server:	Built-in
Max. number of on-line users:	2
ONVIF:	✓
Mobile phones support:	Port no.: 3000 or access by a cloud (P2P) <ul style="list-style-type: none"> <li>• Android: Free application <a href="#">EasyLive Plus</a></li> <li>• iOS (iPhone): Free application <a href="#">EasyLive Plus</a></li> </ul>
Access from PC:	Port no.: 3000 or access by a cloud (P2P) - PC: Free application <a href="#">Easy7 Smart Client Express</a>
Default IP address:	192.168.1.2
Default admin user / password:	admin / - The administrator password should be set at the first start
Web browser access ports:	80, 443, 3000, 3001, 3002, 23002
Mobile client access ports:	3000, 3001
PC client access ports:	3000, 3001
Port ONVIF:	80
Intelligent image analysis:	<ul style="list-style-type: none"> <li>• classification of people and vehicles</li> <li>• crossing the line (tripwire)</li> <li>• intrusion</li> <li>• face detection</li> <li>• video tampering</li> </ul>
Main features:	<ul style="list-style-type: none"> <li>• WDR - 120 dB - Wide Dynamic Range</li> <li>• 3D-DNR - Digital Noise Reduction</li> <li>• F-DNR (Defog) - Reduction of image noise caused by precipitation</li> <li>• ROI - improve the quality of selected parts of image</li> <li>• Corridor mode</li> <li>• AGC - Automatic Gain Control</li> <li>• NAS - Network Attached Storage support - allows to connect memory resources directly to the computer network</li> <li>• ANR - Automatic Network Replenishment allows to save image to the card when the network connection with DVR is break (network failure) and next synchronize its</li> <li>• BLC/HLC - Back Light / High Light Compensation</li> <li>• ICR - Movable InfraRed filter</li> <li>• Day/night mode</li> <li>• Motion Detection</li> </ul>
Power supply:	<ul style="list-style-type: none"> <li>• PoE (802.3af),</li> <li>• 12 V DC / 670 mA</li> </ul>
Power consumption:	≤ 8 W
Housing:	Dome - Metal
Color:	White
"Index of Protection":	IP67
Mechanical protection class:	—
Operation temp:	-40 °C ... 65 °C
Weight:	0.51 kg
Dimensions:	Ø 117 x 86 mm
Supported languages:	Polish, English, Albanian, Spanish, Korean, Italian, Turkish, Russian, Thai, French, Dutch, Hebrew, Arabic, Vietnamese, German, Ukrainian, Portuguese
Manufacturer / Brand:	TIANDY
Guarantee:	<b>3 years</b>

## PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60




Side view:



Mounting side view:



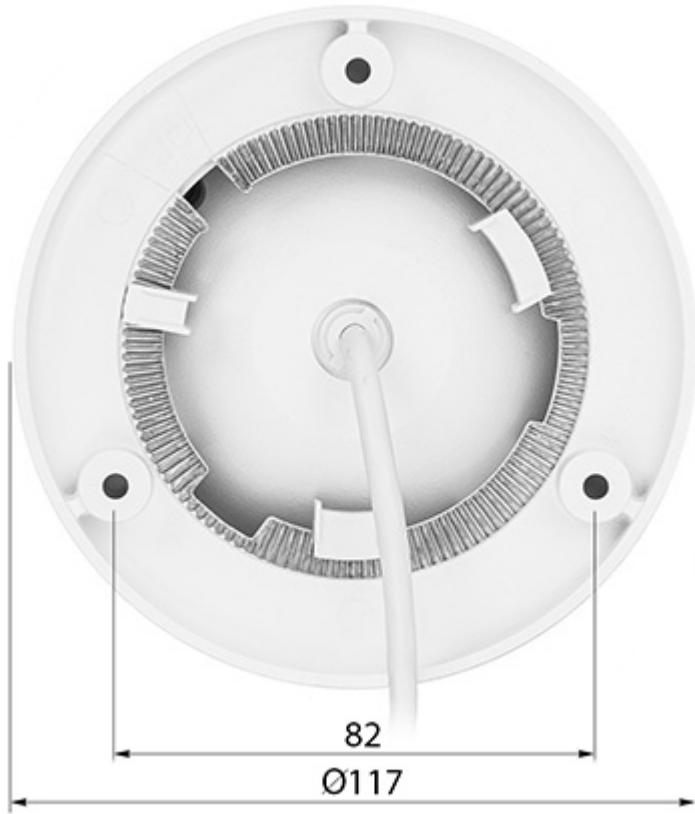

In the kit:



#### PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60