

Code: ART-ARC3000H-03-GW2(868)

ALARM KIT **ART-ARC3000H-03-GW2(868)** DAHUA

Net: 1 742.00 PLN Gross: 1 742.00 PLN

The DAHUA ART-ARC3000H-03-GW2(868) alarm kit is ideal solution for those looking for a simple and reliable system with enhanced communication functions.

The kit includes: the "ARC3000H-GW2(868)" Wireless Alarm Control Panel, the "ARD1233-W2(868)" Wireless PIR Detector, the "ARD323-W2(868)" Wireless Magnet Detector and the "ARA24-W2(868)" Wireless Remote Controller.



SPECIFICATION

Number of supported wireless devices:	max. 150 pcs
Number of supported remote control keyfobs:	max. 64 pcs In the kit 1 pcs
The RFID cards/keyfobs support:	—
Number of supported wireless sirens:	max. 6 pcs (not included)
PIR detectors included:	1 pcs, Wireless
Magnetic contact included:	1 pcs, Wireless
Enclosure included:	✓
Keyboard included:	—
Expander included :	—
Wireless:	868 MHz
Operating range in open area:	max. 2000 m
Built-in modules:	<ul style="list-style-type: none">• LAN 10/100Mb,• Wi-Fi 2.4 GHz,• GSM (GPRS) - It supports push messages, SMS text notifications, and audio notifications via the phone
Access from PC:	<ul style="list-style-type: none">• DMSS application - for the end user• COS Pro application - for the installer
Mobile phones support:	✓
Main features:	<ul style="list-style-type: none">• Bidirectional communication• Two SIM cards support• Support for video events via a mobile client and email• Configuration via the www client, mobile client or software• LED indication
Power supply:	12 V DC / 1.5 A (power adapter included)
Housing:	Plastic

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Color:	White
Operation temp:	-10 °C ... 55 °C
Weight:	0.390 kg
Dimensions:	163 x 163 x 32 mm

MAGNETIC CONTACT:

Detection:	Opening the door or window
Break distance:	~ 40 mm
Alarm signaling:	Signal to control panel
Frequency range:	868 MHz
Radio communication range (at open area):	max. 1200 m (open area)
Alarm inputs:	—
Main features:	<ul style="list-style-type: none"> • Tamper protections • Low battery level alarm • AES128 data encryption
Battery:	1 x CR123A 3 V (included)
Backup time:	~ 5 years
Operation temp:	-10 °C ... 55 °C
Weight:	<ul style="list-style-type: none"> • 0.036 kg - Transmitter • 0.034 kg - Magnet
Dimensions:	<ul style="list-style-type: none"> • 100 x 21 x 21 mm - Transmitter • 100 x 21 x 21 mm - Magnet

PIR DETECTOR:

Application:	Indoor
Pyroelectric sensor:	Double, Low Noise Ratio
Sensor type:	Passive Infra Red (PIR)
Frequency range:	868.0 ... 868.6 MHz
Radio communication range (at open area):	max. 1600 m
Recommended installation height:	2.2 m
Detection range / Detection angle:	12 m / 90 °
Sensitivity adjustment:	max. 3 levels
Pet immunity:	≤ 18 kg
Digital temperature compensation:	✓
Alarm output:	Wireless
Target speed range:	0.3 ... 3 m/s
Main features:	<ul style="list-style-type: none"> • Tamper protections • Low battery level alarm • Frequency hopping against jamming for reliable transmission • AES128 data encryption • Measurement of signal strength and quality • Test mode • Temperature measurement in the range: -15°C ... +65°C • Remote update of software • LED indicator • ON/OFF button
Environment class:	II
Protection class (Grade):	Grade 2



Compliance with standards:	EN50131-1:2006+A2:2017+A3:2020, EN 50131-2-2:2017, EN 50131-6:2017, EN 50131-5-3:2017
Housing:	Plastic (PC + ABS)
Color:	White
Battery:	1 x CR123A 3 V (included)
Backup time:	~ 4 years
Current consumption:	max. 120 mA
Operation temp:	-10 °C ... 55 °C
Weight:	0.106 kg
Dimensions:	60 x 104 x 51 mm

REMOTE CONTROL:

Frequency band:	868 MHz
Radio communication range (at open area):	max. 900 m (in open area)
Main features:	<ul style="list-style-type: none"> • LED indication • Large, readable buttons : arm, disarm, arming only perimeter protection zones, SOS • Configuration is done using the mobile application
Battery:	CR2032 3V (included)
Backup time:	~ 5 years
Operation temp:	-10 °C ... 55 °C
Weight:	0.024 kg
Dimensions:	60 x 40 x 15 mm

General information:

Manufacturer / Brand:	DAHUA
Guarantee:	3 years

PRESENTATION

Wireless Control Panel:





Bottom view (after remove the cover):




Connectors:




Wireless detector:



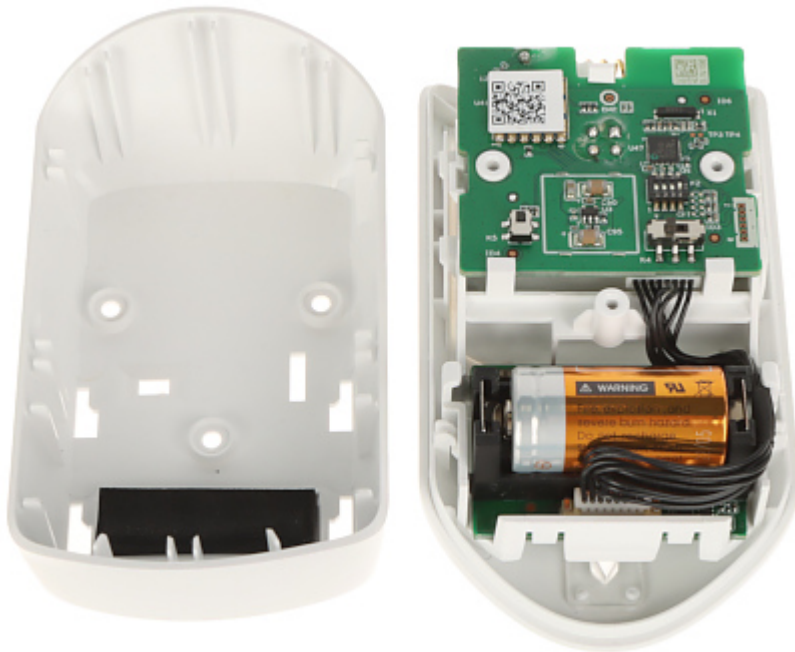

Reed switch:



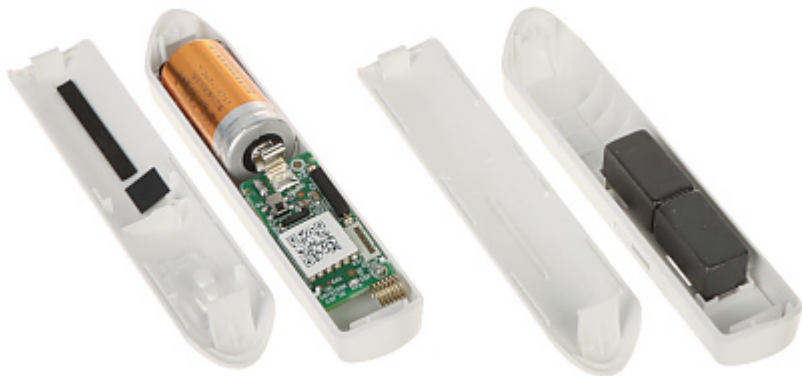

Remote control:



In the kit:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

