

Code: RG-NBS3200-24GT4XS

Switch **RG-NBS3200-24GT4XS** 24-PORT REYEE

Net: **406.57 EUR** Gross: **406.57 EUR**

The RG-NBS3200-24GT4XS switch is designed for large streams of video data in the CCTV IP surveillance networks.



SPECIFICATION

LAN ports:	• 24 x (RJ45) 10/100/1000 Mbps • 4 x port SFP+
Management:	✓
Transmission speed:	10/100/1000 Mbps - 24 x Gigabit Ethernet 10 Gb/s - 4 x port SFP+
Switching performance:	128 Gb/s
Packet redirection speed:	95.24 Mpps
MAC addresses table:	16k
Certificates:	CE, RoHS
Number of fan coolers:	—
Mobile phones support:	Android: Free application Ruijie Reyee iOS (iPhone): Free application Ruijie Reyee
Jumbo Frame:	9 kB
Default IP address:	10.44.77.200
Main features:	• Can be mounted in a Rack cabinet • Switch is managed through the web and the cloud (Ruijie Reyee application) • Access Control List - ACL package filtering based on source and destination IP addresses • IEEE 802.1Q standard support, up to 4096 VLAN groups and 4K VIDs • DHCP client • BPDU Filtering/Guard • Loop back detection • Spanning Tree STP/RSTP • Errdisable Recovery • Up to 16 aggregation groups and up to 8 ports per group • IGMP Snooping V1/V2/V3 • DHCP snooping support • Port mirroring function • Loop Protection • IEEE802.3x Flow Control • MTBF (Mean Time Between Faults) > 200.000 h
Operation temp:	0 °C ... 50 °C
Permissible relative humidity:	10 % ... 90 % (non-condensing)
Protections:	Protection against lightning discharges : 6 kV
Power supply:	100 V ... 240 AC

Power consumption:	≤ 28 W
Weight:	2.84 kg
Dimensions:	440 x 207 x 44 mm
Manufacturer / Brand:	RUIJIE / REYEE
Guarantee:	5 years

PRESENTATION


Front panel:



Rear panel:



In the kit:

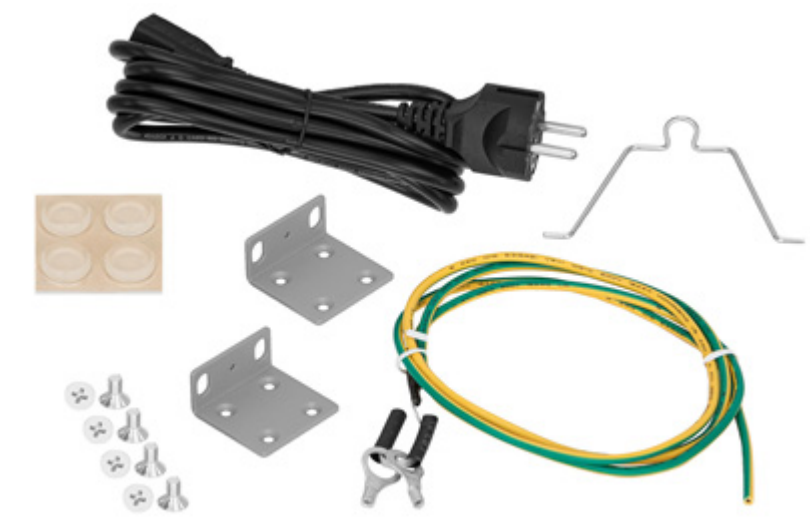

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

