

Code: RS-64

## SWITCH PoE TO RACK CABINET **RS-64** 6-PORT PULSAR

Net: **362.00 PLN** Gross: **445.26 PLN**

The RS-64 PoE Switch is an industrial type device enabling fluent network transmission at rates 10 / 100 Mbps. PoE/PoE+ powering possibility, compatible with the 802.3af/at standard makes the device more universal and easier to install.

The device is mounted to RACK 19" cabinet.



### SPECIFICATION

Standards:	IEEE 802.3, IEEE 802.3u, IEEE 802.3x, IEEE 802.3af, IEEE 802.3at
Protocols:	CSMA/CD, TCP/IP
Management via WWW / console:	—
LAN ports:	<ul style="list-style-type: none"><li>• 4 x RJ45 - LAN &amp; PoE ( 802.3af/at ),</li><li>• 2 x RJ45 - Uplink</li></ul>
Transmission method:	Store and Forward
LED diodes:	Power, PoE, Link/Act
Transmission speed:	10 / 100 Mb/s - 4 x LAN & PoE ports 10 / 100 Mb/s - 2 x Uplink ports
Maximal output power:	30 W / port PoE+
Maximal total power:	48 W
MAC addresses table:	1k - Auto update of MAC addresses table
Main features:	<ul style="list-style-type: none"><li>• Auto-learning and Auto-aging functions support for MAC addresses</li><li>• (RJ45) 10/100 Mb Auto-Negotiation, Auto MDI/MDIX</li><li>• Industrial wide temperature design.</li></ul>
Certificates:	CE
Power supply:	230 V AC
Housing:	Steel - powder painted
Color:	Black (RAL 9005)
Housing type:	RACK 19", 1U
Operation temp:	-10 °C ... 40 °C
Weight:	1.95 kg
Dimensions:	482 x 227 x 44 mm
Manufacturer / Brand:	PULSAR
Guarantee:	2 years


### PRESENTATION

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Front view:




Connectors:

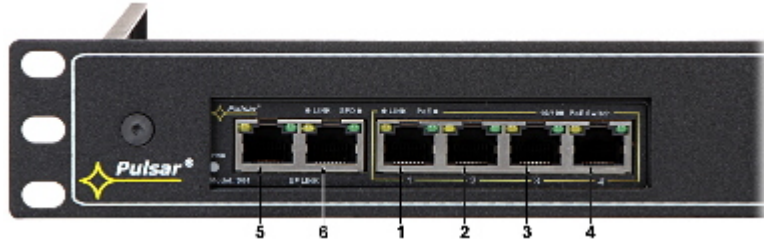

1. LAN + PoE
2. LAN + PoE
3. LAN + PoE
4. LAN + PoE
5. LAN
6. LAN

Top view:

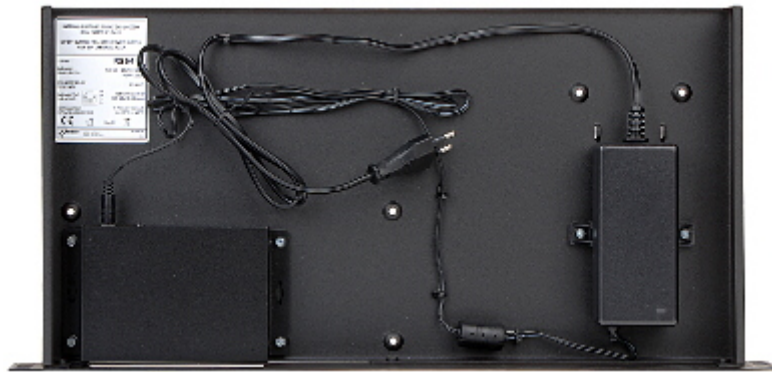

In the kit:

