

Code: DSA-64

Switch PoE 6-PORT **DSA-64** PULSAR

Net: **79.53 EUR** Gross: **79.53 EUR**

DSA-64 is designed to mount on the DIN 35 mm rail. PoE/PoE+ powering possibility, compatible with the 802.3af/at standard makes the device more universal and easier to install. Switch has built-in a 52 V DC power supply adapter with power of 48 W.



SPECIFICATION

LAN ports:	• 6 x RJ45 (4 x PoE (802.3af/at)), • 2 x RJ45 - Uplink
Management:	—
Transmission method:	Store and Forward
LED diodes:	Power, PoE, Link/Act
Transmission speed:	10 / 100 Mbps - 6 x LAN & PoE ports
Maximal output power:	30 W / port PoE+
Maximal total power:	48 W
MAC addresses table:	1k - Auto update of MAC addresses table
Main features:	• DIN, TS-35 rail mounting, • Switch has built-in a 52 V DC power supply adapter with power of 48 W • Auto-learning and Auto-aging functions support for MAC addresses • MDI/MDI-X auto detection feature - auto detecting the data transmission mode • Short-circuit protection • Overload protection
Power supply:	176 V ... 264 V AC
Housing:	Steel - powder painted
Color:	Black (RAL 9005)
Weight:	1.8 kg
Dimensions:	190 x 130 x 90 mm
Manufacturer / Brand:	PULSAR
Guarantee:	2 years

PRESENTATION

Front panel:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



5 6 1 2 3 4

1. LAN + PoE
2. LAN + PoE
3. LAN + PoE
4. LAN + PoE
5. LAN
6. LAN

Rear view:






Example of application:



In the kit:

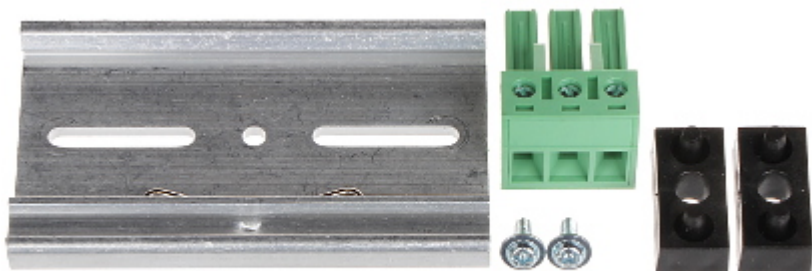

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------