

Code: XPOE-3-10


Switch PoE **XPOE-3-10** 3-PORT ATTE

Net: **32.50 EUR** Gross: **32.50 EUR**

The small dimensions of the device allow convenient installation in an electrical box or camera bracket. The XPOE-3-10 switch was designed as a LAN and PoE extender (repeater). Most often used as a "amplifier" for extending the network over sections longer than 100 m.

The device powered by another Passive PoE switch distributes the power to 2 PoE 802.3af/at cameras. The LAN 1, LAN 2, LAN 3 ports allow connected devices to be powered via Passive PoE.

Attention! The XPOE-3-10 version can be powered ONLY from a Passive PoE switch or adapter and all ATTE Power production devices. To power devices that comply with the PoE 802.3af/at standard, the input voltage must not be lower than 44V DC. Do not connect devices that are not powered by PoE to ports LAN 1, LAN 2, LAN 3.

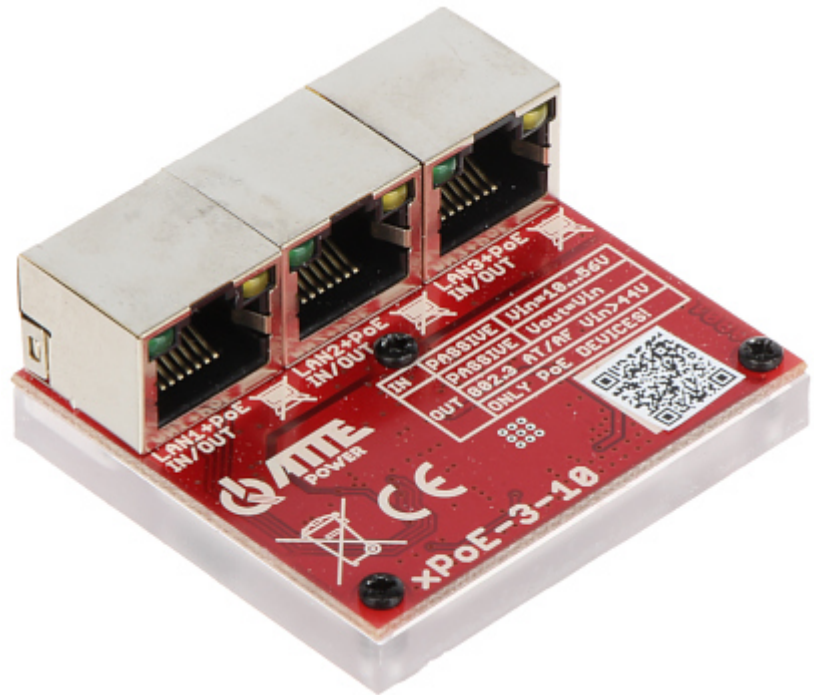

SPECIFICATION


LAN ports:	3 x RJ45 10/100 Base-T + Passive PoE
LED diodes:	LAN, PoE
Management:	—
Transmission speed:	10 / 100 Mbps : 3 LAN & PoE ports
Maximal output power:	70 W @ port PoE
Maximal total power:	70 W @ 55 V
Main features:	• The switch is powered via a Passive PoE switch or adapter and from ATTE Power devices • Possibility to connecting in cascade • The device can function as a LAN network and PoE power extender • The output PoE voltage is equal to the input voltage
Power supply:	10 ... 56 V DC - Passive PoE
Power consumption:	0.8 W
Weight:	0.03 kg
Dimensions:	51 x 46 x 21 mm
Manufacturer / Brand:	ATTE
Guarantee:	3 years

PRESENTATION


Connectors:



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

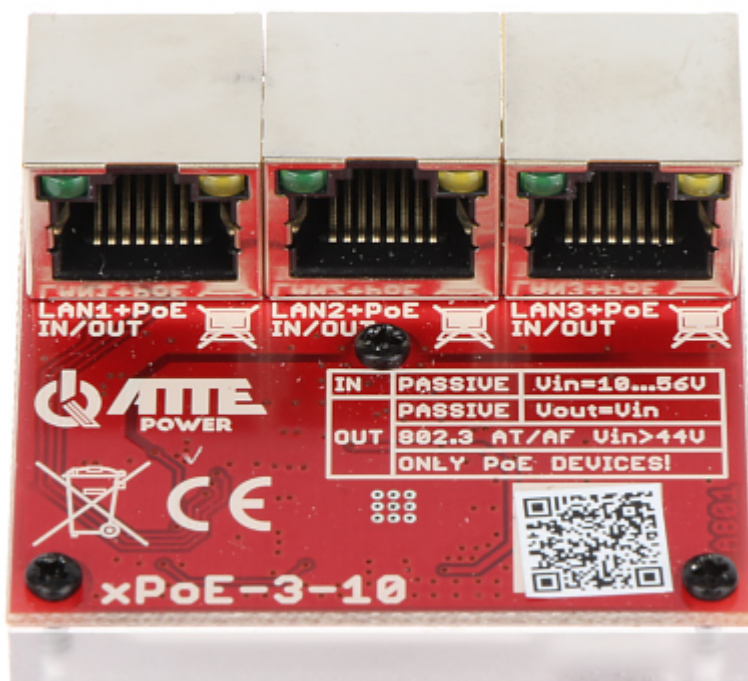

Top view:

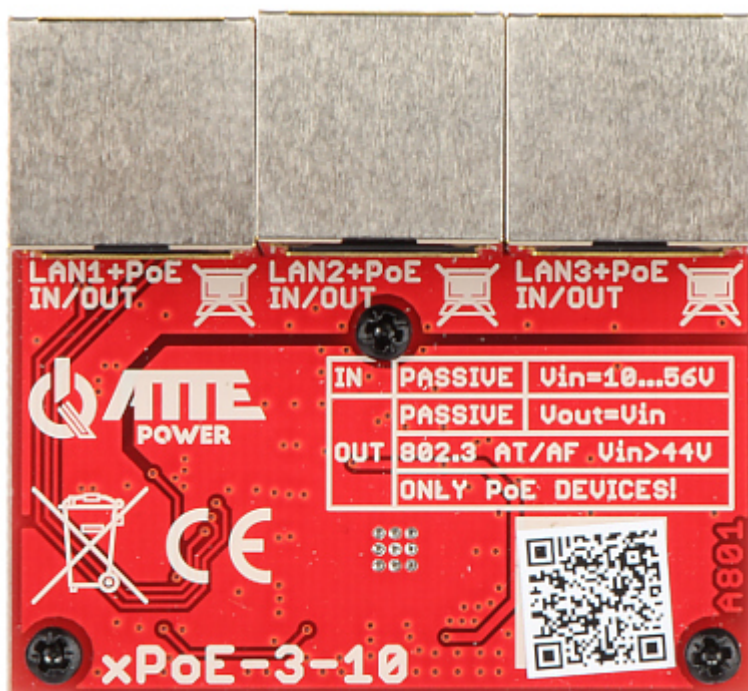

Bottom view:



PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------