

Code: DS-3E1310HP-EI

## SWITCH POE **DS-3E1310HP-EI** 8-PORT Hikvision

Net: **158.80 EUR** Gross: **158.80 EUR**

The DS-3E1310HP-EI switch is designed for large streams of video data in the CCTV IP surveillance networks.



### SPECIFICATION

|                                |                                                                                                                                                                                                                                                                                                                                                    |
|--------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| LAN ports:                     | <ul style="list-style-type: none"><li>• 8 x RJ45 10/100 Base-TX ( 2 x Hi-PoE (802.3af/at/bt) + 6 x PoE (802.3af/at) ),</li><li>• 2 x RJ45 10/100/1000 Base-TX - Uplink</li></ul>                                                                                                                                                                   |
| Transmission speed:            | <ul style="list-style-type: none"><li>• 10 / 100 Mbps - 8 LAN &amp; PoE ports,</li><li>• 10 / 100 / 1000 Mbps - 2 Uplink ports</li></ul>                                                                                                                                                                                                           |
| Maximal output power:          | <ul style="list-style-type: none"><li>• 90 W / port Hi-PoE / PoE 802.3bt - 1, 2 ports</li><li>• 30 W / port PoE 802.3af/at - 3 ... 8 ports</li></ul>                                                                                                                                                                                               |
| Maximal total power:           | 110 W                                                                                                                                                                                                                                                                                                                                              |
| MAC addresses table:           | 16k                                                                                                                                                                                                                                                                                                                                                |
| Management:                    | —                                                                                                                                                                                                                                                                                                                                                  |
| Default IP address:            | 192.168.1.64                                                                                                                                                                                                                                                                                                                                       |
| Default admin user / password: | admin / -                                                                                                                                                                                                                                                                                                                                          |
| Operation modes:               | <ul style="list-style-type: none"><li>• Extend On : 300 m, 10 Mbps @ UTP cat. 5e, 6</li><li>• Extend Off : 100 m, 100 Mbps @ UTP cat. 5e, 6</li></ul>                                                                                                                                                                                              |
| Main features:                 | <ul style="list-style-type: none"><li>• The device supports 8-pin power supply</li><li>• Configuration and management from the iVMS-4200 application</li><li>• Remote update of software</li><li>• View topology and network status</li><li>• Data Flow Control</li><li>• Alarm notifications</li><li>• Possibility to mount to the wall</li></ul> |
| LED diodes:                    | Power, Link/Act, PoE, PoE Max, 9 Uplink, 10 Uplink                                                                                                                                                                                                                                                                                                 |
| Certificates:                  | CE                                                                                                                                                                                                                                                                                                                                                 |
| Housing:                       | Desktop, Metal                                                                                                                                                                                                                                                                                                                                     |
| Protections:                   | Overvoltage 6 kV - PoE ports                                                                                                                                                                                                                                                                                                                       |
| Power supply:                  | 54 V DC / 2.22 A (power adapter included)                                                                                                                                                                                                                                                                                                          |
| Operation temp:                | -10 °C ... 55 °C                                                                                                                                                                                                                                                                                                                                   |
| Weight:                        | 0.54 kg                                                                                                                                                                                                                                                                                                                                            |
| Dimensions:                    | 218 x 103 x 28 mm                                                                                                                                                                                                                                                                                                                                  |
| Manufacturer / Brand:          | Hikvision                                                                                                                                                                                                                                                                                                                                          |
| SAP Code:                      | 301802043                                                                                                                                                                                                                                                                                                                                          |


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Guarantee:

3 years

## PRESENTATION

Front panel:

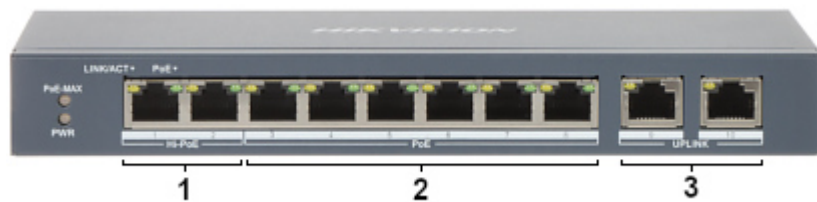

1 - LAN + Hi-PoE

2 - LAN + PoE

3 - Port Uplink

Rear panel:



In the kit:



## PACKAGE

Dimensions (L x W x H): 0x0x0 mm

Gross Weight: 0 kg