

Code: APT-5-50


POE SWITCH / EXTENDER **APT-5-50** 5-PORT ATTE

Net: **95.21 EUR** Gross: **95.21 EUR**

PoE powering possibility, compatible with the 802.3bt standard makes the device more universal and easier to install.

The LAN 1 port functions as an Uplink port and POE 802.3af/at/bt power input. The LAN 2 ... LAN 5 ports allow connected devices to be powered via POE 802.3af/at/bt.

Attention! To power devices that comply with the POE 802.3af/at/bt standard, the input voltage must not be lower than 44V DC.

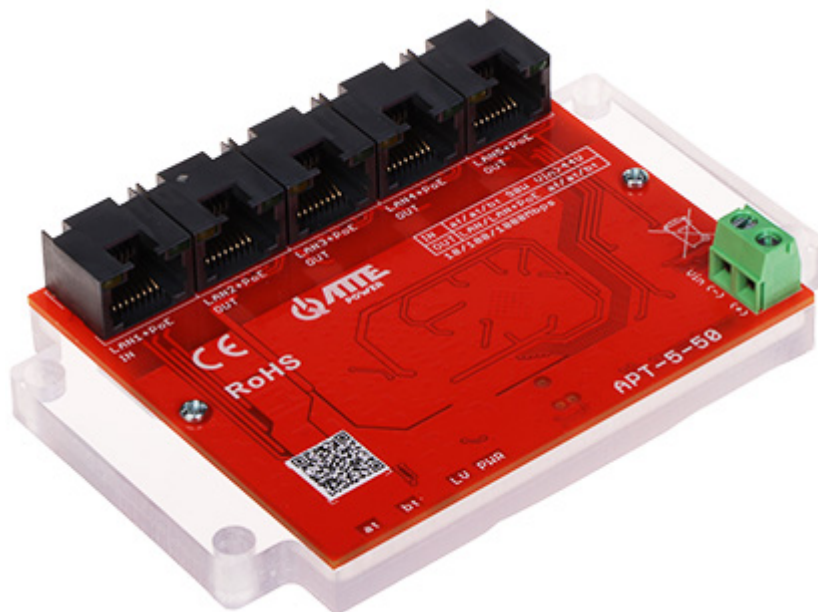

SPECIFICATION


LAN ports:	• 1 x RJ45 10/100/1000 Base-T + power input : Hi-PoE (802.3af/at/bt), • 4 x RJ45 10/100/1000 Base-T + Hi-PoE (802.3af/at/bt) / Passive PoE
Management:	—
LED diodes:	LAN, PoE
Transmission speed:	10/100/1000 Mbps : 1 Port LAN + PoE IN 10/100/1000 Mbps : 4 Port LAN + PoE OUT
Maximal output power:	60 W @ port PoE
Maximal total power:	90 W
Main features:	• Switch powered by PoE in accordance with the IEEE 802.3af/at/bt standard • Possibility to connecting in cascade • The device can function as a LAN network and PoE power extender • The output PoE voltage is equal to the input voltage
Power supply:	• 44 ... 58 V DC - cable terminal • 44 ... 57 V DC - Hi-PoE (802.3af/at/bt) @ LAN 1
Power consumption:	< 0.3 W
Weight:	0.82 kg
Dimensions:	105 x 70 x 21 mm
Manufacturer / Brand:	ATTE
Guarantee:	3 years

PRESENTATION

Top view:




DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

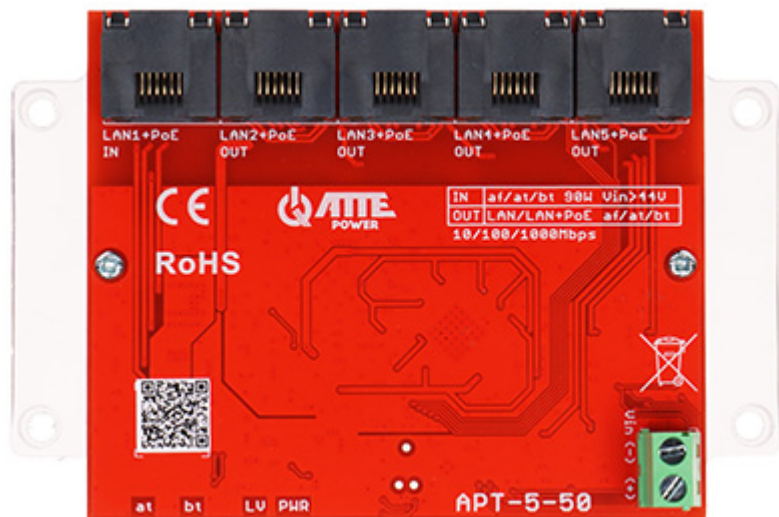

Bottom view:



In the kit:

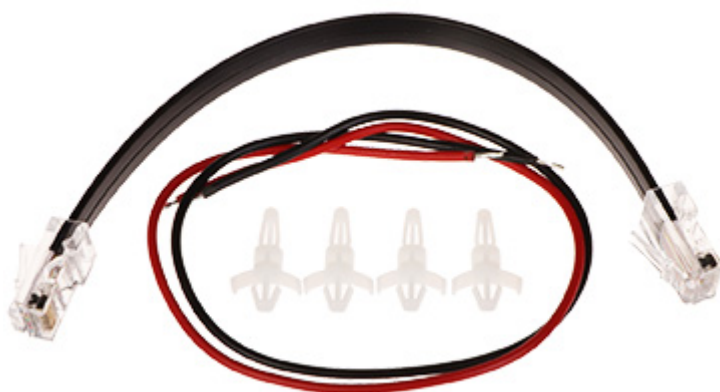

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

