

Code: GTX-CLM1-6-4G2G

## SWITCH POE GTX-CLM1-6-4G2G 4-PORT

Net: 67.95 EUR Gross: 67.95 EUR

Due to the reliability and ensuring high quality of transmission, the GTX-CLM1-6-4G2G 4-port PoE switch is an ideal solution for applications in CCTV IP installations. PoE powering possibility, compatible with the 802.3af/at standard makes the device more universal and easier to install.

**Attention!** When the Extend function is enabled the PoE range increases up to 250m and the transmission speed reduces to 10 Mb/s.



### SPECIFICATION

LAN ports:	<ul style="list-style-type: none"><li>• 4 x RJ45 ( 4 x PoE (802.3af/at) ),</li><li>• 2 x RJ45 - Uplink</li></ul>
Management:	✓
Transmission speed:	10 / 100 / 1000 Mbps : 2 x Port LAN - Uplink + 4 x Port LAN & PoE
Operation modes:	<ul style="list-style-type: none"><li>• EXTEND mode</li><li>• Port Isolation</li></ul>
Default IP address:	192.168.2.1
Default admin user / password:	admin / admin
Maximal output power:	30 W / port PoE
Maximal total power:	65 W
Main features:	<ul style="list-style-type: none"><li>• QoS - mechanisms, which provide the high quality of transmission</li><li>• Spanning Tree STP/RSTP</li><li>• VLAN support - Supports up to 16 VLANs at the same time (for 4K ID VLAN addresses)</li><li>• Port mirroring function</li><li>• MTBF (Mean Time Between Faults) : 50000 h</li></ul>
LED diodes:	PWR, PoE, Link/Act
Certificates:	CE, FCC, RoHS
Protections:	Overvoltage $\pm$ 4 kV
Power supply:	100 ... 264 V AC, Power adapter included
Housing:	Metal
Operation temp:	-10 °C ... 45 °C
Weight:	0.65 kg
Dimensions:	200 x 118 x 44 mm
Guarantee:	2 years

### PRESENTATION



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Front view:



Rear view:



In the kit:

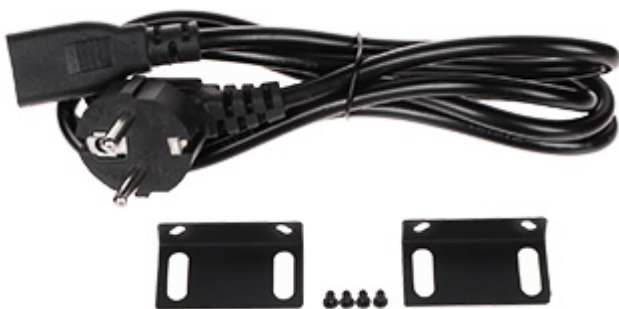

Sample interface screenshot:

GTx-CLM1-6-4G2G

Global Configuration

Power Supply: 60 V

Apply

Port Setting

Port	PoE Mode	Extend PoE Mode	PoE Auto-checking	PoE Reboot
Port 1	Enable	OFF	OFF	<input type="checkbox"/>
Port 2	Enable	OFF	OFF	<input type="checkbox"/>
Port 3	Enable	OFF	OFF	<input type="checkbox"/>
Port 4	Enable	OFF	OFF	<input type="checkbox"/>

Apply

Port	PD Class	Power Allocated	Power Used	Current Used	Extend PoE Mode	PoE Auto-checking	PoE Real Status
Port 1	-	0[W]	0[W]	0[mA]	OFF	OFF	No PD detected
Port 2	-	0[W]	0[W]	0[mA]	OFF	OFF	No PD detected
Port 3	-	0[W]	0[W]	0[mA]	OFF	OFF	No PD detected
Port 4	-	0[W]	0[W]	0[mA]	OFF	OFF	No PD detected

## PACKAGE



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------

