

Code: IP-8-20-H

Switch PoE **IP-8-20-H** 10-PORT ATTE

Net: **216.49 EUR** Gross: **266.28 EUR**



The IP-8-20-H set consists of the XPOE-10-20-OF switch module and the APS-90-480-OF switching power supply enclosed in the ABOX-H internal enclosure with space for the recorder.



SPECIFICATION

Standards:	IEEE 802.3af, IEEE 802.3at
Management via WWW / console:	—
LAN ports:	<ul style="list-style-type: none">• 2 x RJ45 10/100/1000 Base-TX - Uplink• 8 x RJ45 10/100 Base-TX + PoE (802.3af/at) / Passive PoE
LED diodes:	Power, LAN
Transmission speed:	<ul style="list-style-type: none">• 10 / 100 Mbps : 8 LAN & PoE ports• 10 / 100 / 1000 Mbps : 2 Port LAN
Maximal output power:	<ul style="list-style-type: none">• 40 W @ Passive PoE - 1 ... 8 ports,• 30 W @ PoE (802.3at) - 1 ... 8 ports,• 15.4 W @ PoE (802.3af) - 1 ... 8 ports
Maximal total power:	96 W

Main features:	<ul style="list-style-type: none"> • 4K resolution support • Pin numbers for RJ-45 connector : 1/2, 3/6 - Wires to data transmission ; 4/5, 7/8 - Power supply • Possibility to connecting in cascade • Efficiency : 92 % @ 90 W • Built-in switching power supply : 48 V DC / 96 W • PSU thermal protection • Short-circuit protection • Overload protection • TAMPER switch indicating open the cover • The ability to independently turn on and off the PoE power for each of the LAN 1 ... LAN 8 ports • Electronic fuse independently for each PoE channel • The modular design streamlines service tasks and enables quick and easy system expansion • The raster system of module assembly facilitates the expansion of the device by further modules • Main cable entries on the back of the enclosure • "Index of Protection" : IP20
Power supply:	180 ... 240 V AC - Built-in switching power supply
Weight:	4.33 kg
Dimensions:	400 x 450 x 140 mm
Manufacturer / Brand:	ATTE
Guarantee:	3 years

PRESENTATION

Internal view of the housing:

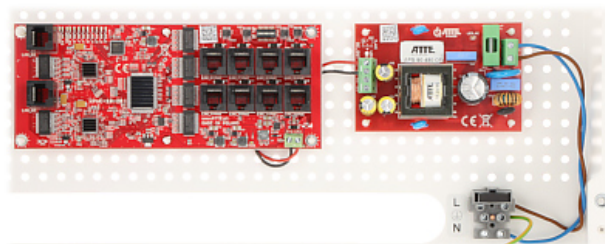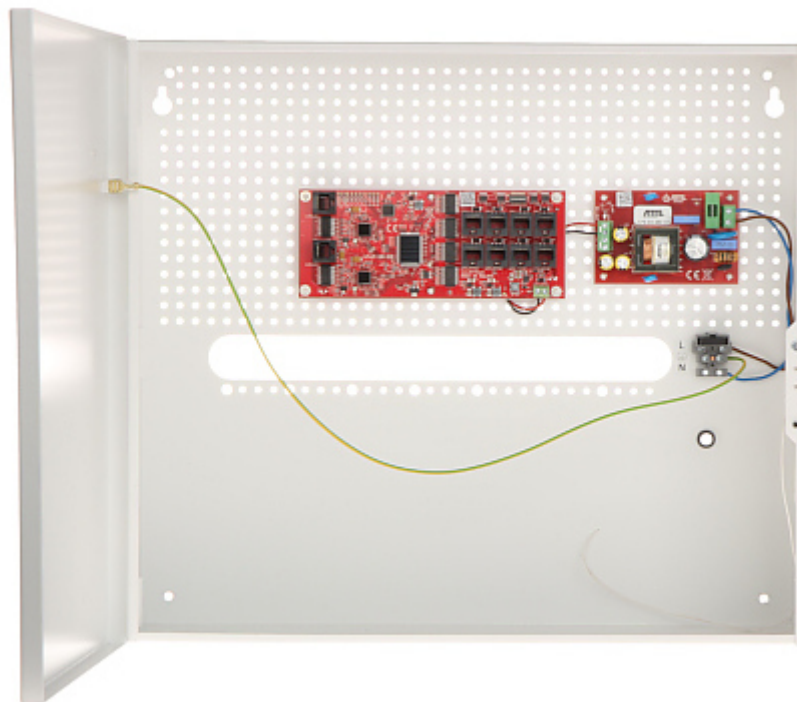

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Mounting side view:

