

Code: GTX-B1-16-162SFP

SWITCH POE **GTX-B1-16-162SFP** 16-PORT SFP

Net: **265.64 EUR** Gross: **326.74 EUR**

Due to the reliability and ensuring high quality of transmission, the GTX-B1-16-162SFP 16-port PoE switch is an ideal solution for applications in CCTV IP installations. PoE powering possibility, compatible with the 802.3af/at standard makes the device more universal and easier to install.



SPECIFICATION

LAN ports:	<ul style="list-style-type: none">• 16 x RJ45 (16 x PoE (802.3af/at)),• 2 x Port SFP - Uplink
Management:	—
LED diodes:	Power, PoE, Link/Act, Speed
Transmission speed:	<ul style="list-style-type: none">• 1000 Mbps : 2 x Port SFP - Uplink,• 10 / 100 / 1000 Mbps : 16 x Port LAN & PoE
Operation modes:	<ul style="list-style-type: none">• NOM - Normal - the device operates as normal PoE switch• VLAN - 1 ... 14 ports• CENK (Surveillance Priority Transmission for Uplink) - port traffic balancing control to prevent loss of large data packets
Maximal output power:	30 W / port PoE - 1 ... 16 ports
Maximal total power:	300 W
MAC addresses table:	8k
Main features:	<ul style="list-style-type: none">• MDI/MDI-X auto detection feature - auto detecting the data transmission mode• Full Duplex: IEEE802.3x, Half Duplex: Back Pressure• MTBF (Mean Time Between Faults) : 50000 h
Certificates:	CE, FCC Class B
Power supply:	100 ... 265 V AC
Operation temp:	-10 °C ... 45 °C
Weight:	3.17 kg
Dimensions:	440 x 290 x 45 mm, RACK 19", 1U
Guarantee:	2 years

PRESENTATION

Front view:


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



1 - LAN + PoE
2 - SFP
Rear view:



In the kit:

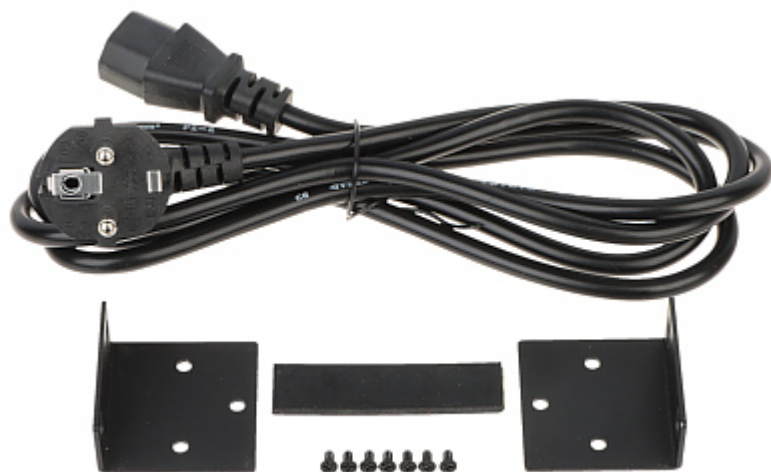

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------