

Code: PFS4226-24ET-360-V3

## SWITCH POE **PFS4226-24ET-360-V3** 24-PORT SFP DAHUA

Net: **293.42 EUR** Gross: **293.42 EUR**

Due to reliability and ensuring high quality of transmission, the PFS4226-24ET-360-V3 10/100 Mb/s 24-port PoE desktop type switch is perfect solution for expanding home or office network.

Attention! The SFP port requires the SFP module, which is available in our offer.



### SPECIFICATION

LAN ports:	<ul style="list-style-type: none"><li>• 24 x RJ45 - 10/100 Base-T ( 22 PoE (802.3af/at) + 2 Hi-PoE / PoE (802.3bt) / PoE (802.3af/at) ),</li><li>• 2 x port Combo: SFP (1000 Base-X) / RJ45 (10/100/1000 Base-T) - Uplink,</li><li>• 1 x RJ45 - Console</li></ul>
Management:	✓
Transmission speed:	<ul style="list-style-type: none"><li>• Ethernet - 10 Mbps Full Duplex,</li><li>• Fast Ethernet - 100 Mbps Full Duplex,</li><li>• Gigabit Ethernet - 1000 Mbps Full Duplex ( Uplink )</li></ul>
Maximal output power:	<ul style="list-style-type: none"><li>• 30 W / port PoE</li><li>• 90 W / port Hi-PoE / PoE 802.3bt</li></ul>
Maximal total power:	360 W
Operation modes:	<ul style="list-style-type: none"><li>• Extend On : 250 m, 10 Mbps</li><li>• Extend Off : 100 m, 100 Mbps</li></ul>
MAC addresses table:	4k
Main features:	<ul style="list-style-type: none"><li>• Switch is web managed</li><li>• Intelligent management of Power Supply Unit power's output stage</li><li>• Green PoE</li><li>• protection against lightning discharges and voltage differences and strokes between devices</li><li>• IEEE 802.1Q VLAN</li><li>• Spanning Tree STP/RSTP</li><li>• Data Flow Control (802.3x)</li><li>• Port mirroring function</li><li>• IGMP Snooping</li><li>• DHCP client</li><li>• Hardware supports IP + MAC binding based on port</li><li>• MAC addresses filtering</li><li>• IEEE 802.1x port authentication</li><li>• QoS/DSCP priority based on IEEE 802.1p standard</li><li>• Watchdog PoE</li><li>• Ports marked in red support IEEE802.3af, IEEE802.3at, IEEE802.3bt and Hi-PoE standards with a maximum output power of 90 W per port - designed to power high power devices</li><li>• Range PoE : 250 m @ 10 Mbps</li><li>• The device supports 8-pin power supply</li><li>• Console : RJ-45 output</li><li>• RESET button</li></ul>
LED diodes:	Power : 50 % / 80 % / 100 %, Link, PoE, System
Certificates:	CE
Power supply:	100 ... 240 V AC

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
POL; 60-713 Poznań; Graniczna 10  
e-mail: [delta-opti@delta.poznan.pl](mailto:delta-opti@delta.poznan.pl); tel: +(48) 61 864 69 60


Housing type:	RACK 19", 1U
Operation temp:	-10 °C ... 55 °C
Weight:	3.38 kg
Dimensions:	440 x 300 x 44 mm
Manufacturer / Brand:	DAHUA
Guarantee:	<b>5 years</b>

## PRESENTATION

Front view:



Rear view:

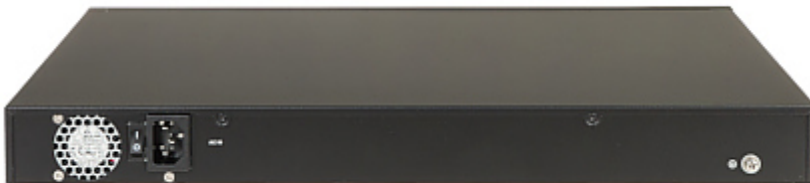

In the kit:



## PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>  
 POL; 60-713 Poznań; Graniczna 10  
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60