

Code: GTX-CLM1-18-16G2G2SFP

SWITCH POE **GTX-CLM1-18-16G2G2SFP** 16-PORT SFP

Net: **321.05 EUR** Gross: **321.05 EUR**

Due to the reliability and ensuring high quality of transmission, the GTX-CLM1-18-16G2G2SFP 16-port PoE switch is an ideal solution for applications in CCTV IP installations. PoE powering possibility, compatible with the 802.3af/at standard makes the device more universal and easier to install.



SPECIFICATION

LAN ports:	• 16 x RJ45 (16 x PoE (802.3af/at)), • 2 x RJ45 - Uplink • 2 x Port SFP - Uplink
Management:	✓
LED diodes:	Power, PoE, Link/Act, SYS
Transmission speed:	• 10 / 100 / 1000 Mbps : 16 x Port LAN & PoE • 10 / 100 / 1000 Mbps : 2 x LAN ports - Uplink • 1000 Mbps : 2 x Port SFP - Uplink
Default IP address:	192.168.2.1
Default admin user / password:	admin / admin
Maximal output power:	30 W / port PoE - 1 ... 16 ports
Maximal total power:	280 W
Main features:	• Loop Protection • Data Flow Control • VLAN support • QoS - mechanisms, which provide the high quality of transmission • RESET button • Can be mounted in a Rack cabinet
Certificates:	CE, FCC, RoHS
Protections:	Overvoltage ± 4 kV
Power supply:	100 ... 240 V AC
Operation temp:	-10 °C ... 45 °C
Weight:	2.52 kg
Dimensions:	440 x 215 x 45 mm, RACK 19", 1U
Guarantee:	2 years

PRESENTATION

Front view:


DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60



- 1 - LAN + PoE
 - 2 - RJ45 (Uplink)
 - 3 - SFP (Uplink)
- Rear view:



In the kit:

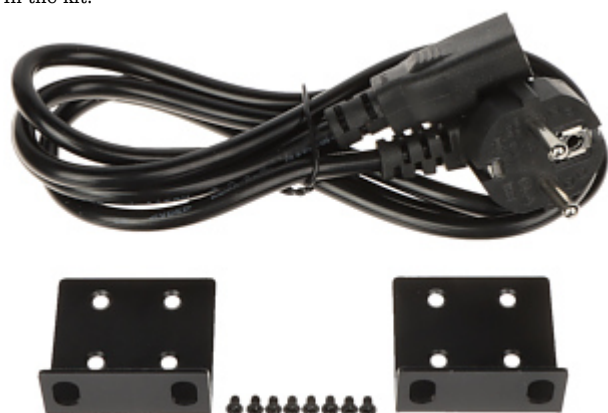

PACKAGE

Dimensions (L x W x H): 0x0x0 mm	Gross Weight: 0 kg
----------------------------------	--------------------



DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
 POL; 60-713 Poznań; Graniczna 10
 e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60