

Code: SXTG-5HPACD-SA

ACCESS POINT WITH ANTENNA **SXTG-5HPACD-SA** MIKROTIK

Net: **135.31 USD** Gross: **166.43 USD**



The SXTG-5HPACD-SA is an integrated solution for professional outdoor wireless networks. Thanks to a unique construction, device offers unparalleled performance in such a compact device.

The casing made of UV resistant plastic is resistant to even the most severe weather conditions. The device is compatible with MikroTik RouterOS platform.

SPECIFICATION

Frequency range:	5745 MHz ... 5825 MHz
Antenna type:	13 dBi Integrated, 2Tx 2Rx MIMO
Standards:	IEEE 802.11ac, IEEE 802.11a, IEEE 802.11n
Baud rates:	866 Mb/s
Max. power consumption:	12 W
Ethernet interface:	10 / 100 / 1000 Mbps - Gigabit Ethernet
Vertical beam width (V):	90 °
Horizontal beam width (H):	90 °
Operation mode:	Access Point, Access Point WDS, Sector Access Point, Client, WDS client, Router or Bridge - 4 The level of license MikroTik RouterOS
Protections:	Overvoltage protection
Transmitter power:	30 dBm
Memory:	128 MB RAM, 128 MB NAND
Processor:	QCA9882 720 MHz
Port USB:	2.0
Power supply PoE:	✓
Power supply:	15 V ... 60 V DC PoE (power adapter included), PoE (802.3af/at)
Operation temp:	-30 °C ... 80 °C

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60

Weight:	0.292 kg
Dimensions:	Ø 140 x 66 mm
Manufacturer / Brand:	MikroTik
Guarantee:	2 years

PRESENTATION

Side view:



Top view:




Mounting side view:



Device connectors:



Polar pattern for horizontal polarization (respectively horizontal and vertical plane):

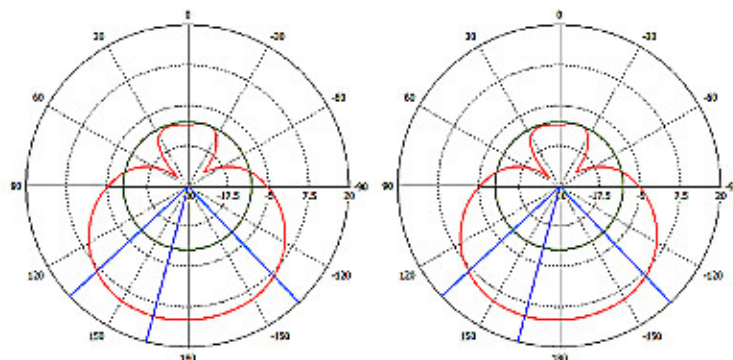

In the kit:

