

Code: TL-WA901ND

ACCESS POINT **TL-WA901ND** TP-LINK

Net: **35.25 EUR** Gross: **43.36 EUR**

The TP-Link TL-WA901ND is a device working in MU-MIMO (Multi-User Multiple Input Multiple Output) standard. The MU-MIMO technology allows to optimize data transfer by using multiple transmitters in parallel to connect to several clients simultaneously.

The device is easy to use and manage.



SPECIFICATION

Frequency range:	2.4 GHz ... 2.4835 GHz
Antenna type:	3 x Omnidirectional antenna (złącze SMA R/P) - 3 MIMO, 5 dBi
Standards:	<ul style="list-style-type: none">• IEEE 802.11n,• IEEE 802.11g,• IEEE 802.11b
Baud rates:	450 Mbps
Protections:	WEP / WPA / WPA2-Personal / WPA2-Enterprise
LAN ports:	1 x 10/100 Mbps
Transmitter power:	20 dBm (max)
Receiver sensitivity:	270M : -68 dBm @ 10 % PER 130M : -68 dBm @ 10 % PER 108M : -68 dBm @ 10 % PER 54M : -68 dBm @ 10 % PER 11M : -85 dBm @ 8 % PER 6M : -88 dBm @ 10 % PER 1M : -90 dBm @ 8 % PER
Operation modes:	Access Point, Access Point Client, Repeater, Bridge (Point to Point, Point to Multipoint)+AP
Power supply PoE:	<input checked="" type="checkbox"/>
Power supply:	9 V / 0.85 A - Power adapter + PoE Adapter included
Power consumption:	7.65 W

DELTA-OPTI Monika Matysiak; <https://www.delta.poznan.pl>
POL; 60-713 Poznań; Graniczna 10
e-mail: delta-opti@delta.poznan.pl; tel: +(48) 61 864 69 60


Main features:	<ul style="list-style-type: none"> • Possibility to mount on the wall or ceiling • MAC addresses filtering • The WPS function allows to easy establish an encrypted connection • Multi-SSID • Remote management • WMM (Wi-Fi Multimedia) • Wireless transmission statistics • Rate limit
Operation temp:	0 °C ... 40 °C
Permissible relative humidity:	10 % ... 90 %
Weight:	0.24 kg
Dimensions:	180 x 126 x 35 mm
Manufacturer / Brand:	TP-LINK
Guarantee:	2 years

PRESENTATION

Front view:



Rear panel:

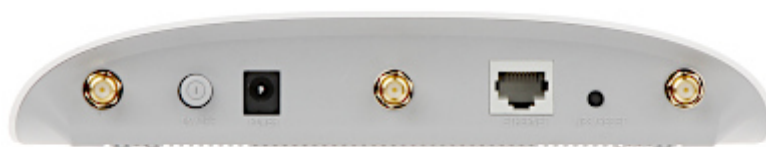

In the kit:



OUR OPINIONS



- Modern and ergonomic design.